



# SGM2074

## 500mA, Fast Load Transient Response, 1.2V Logic, Low Noise, Low Dropout, Bias Rail CMOS Voltage Regulator

### GENERAL DESCRIPTION

The SGM2074 is a low noise, low dropout, bias rail CMOS voltage regulator. It is capable of supplying 500mA output current with typical  $V_{IN}$  dropout voltage of only 125mV. The operating input voltage range is from 0.8V to 5.5V and bias supply voltage range is from 2.5V to 5.5V. The output voltage range is from 0.8V to 3.6V.

Other features include 1.2V logic-controlled shutdown mode, short-circuit current limit and thermal shutdown protection. The SGM2074 has automatic discharge function to quickly discharge  $V_{OUT}$  in the disabled status.

The SGM2074 is suitable for applications which need low noise, fast load transient response and low  $I_Q$  consumption, such as battery-powered equipment and smartphones, etc.

The SGM2074 is available in Green SOT-23-5, SOT-23-6 and XTDFN-1.2×1.2-6L packages. It operates over an operating temperature range of -40°C to +125°C.

### APPLICATIONS

Portable Equipment

Smartphone

Industrial and Medical Equipment

### FEATURES

- Input Supply Voltage Range: 0.8V to 5.5V
- Bias Supply Voltage Range: 2.5V to 5.5V
- Fixed Output from 0.8V to 3.6V
- Adjustable Output from 0.8V to 3.6V
- Output Voltage Accuracy:  $\pm 1\%$  at +25°C
- 500mA Output Current
- Low Dropout Voltage: 125mV (TYP) at 500mA
- Low Noise: 31 $\mu$ V<sub>RMS</sub> (TYP)
- Very Low BIAS Pin Operating Current: 120 $\mu$ A (MAX)
- Very Low BIAS Pin Disable Current: 0.5 $\mu$ A (MAX)
- Current Limiting and Thermal Protection
- Excellent Load and Line Transient Responses
- Supports 1.2V Logic Enable Input for ON/OFF Control
- With Output Automatic Discharge
- Stable with Small Case Size Ceramic Capacitors
- -40°C to +125°C Operating Temperature Range
- Available in Green SOT-23-5, SOT-23-6 and XTDFN-1.2×1.2-6L Packages

### TYPICAL APPLICATION

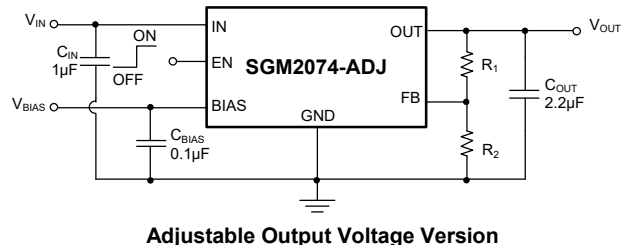
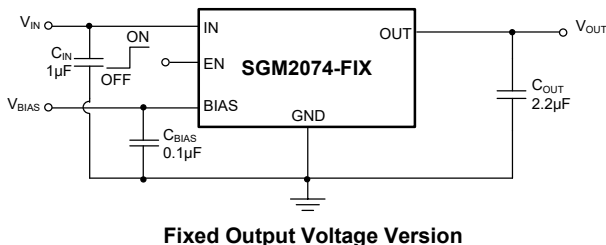


Figure 1. Typical Application Circuits

# 500mA, Fast Load Transient Response, 1.2V Logic, SGM2074 Low Noise, Low Dropout, Bias Rail CMOS Voltage Regulator

## PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM2074-0.8	SOT-23-5	-40°C to +125°C	SGM2074-0.8XN5G/TR	18SXX	Tape and Reel, 3000
SGM2074-0.9	SOT-23-5	-40°C to +125°C	SGM2074-0.9XN5G/TR	18TXX	Tape and Reel, 3000
SGM2074-1.0	SOT-23-5	-40°C to +125°C	SGM2074-1.0XN5G/TR	18UXX	Tape and Reel, 3000
SGM2074-1.05	SOT-23-5	-40°C to +125°C	SGM2074-1.05XN5G/TR	18VXX	Tape and Reel, 3000
SGM2074-1.1	SOT-23-5	-40°C to +125°C	SGM2074-1.1XN5G/TR	18WXX	Tape and Reel, 3000
SGM2074-1.15	SOT-23-5	-40°C to +125°C	SGM2074-1.15XN5G/TR	18XXX	Tape and Reel, 3000
SGM2074-1.2	SOT-23-5	-40°C to +125°C	SGM2074-1.2XN5G/TR	18YXX	Tape and Reel, 3000
SGM2074-1.25	SOT-23-5	-40°C to +125°C	SGM2074-1.25XN5G/TR	18ZXX	Tape and Reel, 3000
SGM2074-1.3	SOT-23-5	-40°C to +125°C	SGM2074-1.3XN5G/TR	190XX	Tape and Reel, 3000
SGM2074-1.5	SOT-23-5	-40°C to +125°C	SGM2074-1.5XN5G/TR	191XX	Tape and Reel, 3000
SGM2074-1.8	SOT-23-5	-40°C to +125°C	SGM2074-1.8XN5G/TR	192XX	Tape and Reel, 3000
SGM2074-2.5	SOT-23-5	-40°C to +125°C	SGM2074-2.5XN5G/TR	193XX	Tape and Reel, 3000
SGM2074-2.8	SOT-23-5	-40°C to +125°C	SGM2074-2.8XN5G/TR	194XX	Tape and Reel, 3000
SGM2074-3.0	SOT-23-5	-40°C to +125°C	SGM2074-3.0XN5G/TR	195XX	Tape and Reel, 3000
SGM2074-3.3	SOT-23-5	-40°C to +125°C	SGM2074-3.3XN5G/TR	196XX	Tape and Reel, 3000
SGM2074-3.6	SOT-23-5	-40°C to +125°C	SGM2074-3.6XN5G/TR	0MGXX	Tape and Reel, 3000
SGM2074-ADJ	SOT-23-6	-40°C to +125°C	SGM2074-ADJXN6G/TR	0MFX	Tape and Reel, 3000
SGM2074-0.8	XTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2074-0.8XXED6G/TR	04 XX	Tape and Reel, 5000
SGM2074-0.9	XTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2074-0.9XXED6G/TR	05 XX	Tape and Reel, 5000
SGM2074-1.0	XTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2074-1.0XXED6G/TR	06 XX	Tape and Reel, 5000
SGM2074-1.05	XTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2074-1.05XXED6G/TR	01 XX	Tape and Reel, 5000
SGM2074-1.1	XTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2074-1.1XXED6G/TR	02 XX	Tape and Reel, 5000
SGM2074-1.15	XTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2074-1.15XXED6G/TR	07 XX	Tape and Reel, 5000
SGM2074-1.2	XTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2074-1.2XXED6G/TR	03 XX	Tape and Reel, 5000
SGM2074-1.25	XTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2074-1.25XXED6G/TR	08 XX	Tape and Reel, 5000
SGM2074-1.3	XTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2074-1.3XXED6G/TR	09 XX	Tape and Reel, 5000
SGM2074-1.5	XTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2074-1.5XXED6G/TR	0A XX	Tape and Reel, 5000
SGM2074-1.8	XTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2074-1.8XXED6G/TR	0B XX	Tape and Reel, 5000
SGM2074-2.5	XTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2074-2.5XXED6G/TR	0C XX	Tape and Reel, 5000
SGM2074-2.8	XTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2074-2.8XXED6G/TR	0D XX	Tape and Reel, 5000

# 500mA, Fast Load Transient Response, 1.2V Logic, SGM2074 Low Noise, Low Dropout, Bias Rail CMOS Voltage Regulator


## PACKAGE/ORDERING INFORMATION (continued)

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM2074-3.0	XTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2074-3.0XXED6G/TR	0E XX	Tape and Reel, 5000
SGM2074-3.3	XTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2074-3.3XXED6G/TR	0F XX	Tape and Reel, 5000
SGM2074-3.6	XTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2074-3.6XXED6G/TR	0G XX	Tape and Reel, 5000
SGM2074-ADJ	XTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2074-ADJXXED6G/TR	00 XX	Tape and Reel, 5000


## MARKING INFORMATION

NOTE: XX = Date Code.

### SOT-23-5/SOT-23-6



### XTDFN-1.2×1.2-6L



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

## ABSOLUTE MAXIMUM RATINGS

IN, BIAS, EN to GND .....	-0.3V to 6V
OUT, FB to GND .....	-0.3V to (V <sub>IN</sub> + 0.3V)
Package Thermal Resistance	
SOT-23-5, θ <sub>JA</sub> .....	194.1°C/W
SOT-23-5, θ <sub>JB</sub> .....	48.9°C/W
SOT-23-5, θ <sub>JC</sub> .....	91.1°C/W
SOT-23-6, θ <sub>JA</sub> .....	179.1°C/W
SOT-23-6, θ <sub>JB</sub> .....	46.9°C/W
SOT-23-6, θ <sub>JC</sub> .....	96.5°C/W
XTDFN-1.2×1.2-6L, θ <sub>JA</sub> .....	150.5°C/W
XTDFN-1.2×1.2-6L, θ <sub>JB</sub> .....	93.2°C/W
XTDFN-1.2×1.2-6L, θ <sub>JC(TOP)</sub> .....	108.2°C/W
XTDFN-1.2×1.2-6L, θ <sub>JC(BOT)</sub> .....	85.1°C/W
Junction Temperature .....	+150°C
Storage Temperature Range.....	-65°C to +150°C
Lead Temperature (Soldering, 10s) .....	+260°C
ESD Susceptibility	
HBM.....	8000V
CDM .....	1000V

## RECOMMENDED OPERATING CONDITIONS

Input Supply Voltage Range .....	0.8V to 5.5V
Bias Supply Voltage Range .....	2.5V to 5.5V
Enable Input Voltage Range .....	0V to 5.5V
Bias Effective Capacitance, C <sub>BIAS</sub> .....	0.1µF (MIN)
Input Effective Capacitance, C <sub>IN</sub> .....	0.5µF (MIN)
Output Effective Capacitance, C <sub>OUT</sub> .....	1µF to 100µF
Operating Junction Temperature Range .....	-40°C to +125°C

## OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

## ESD SENSITIVITY CAUTION


This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

## DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

# 500mA, Fast Load Transient Response, 1.2V Logic, SGM2074 Low Noise, Low Dropout, Bias Rail CMOS Voltage Regulator

## PIN CONFIGURATIONS

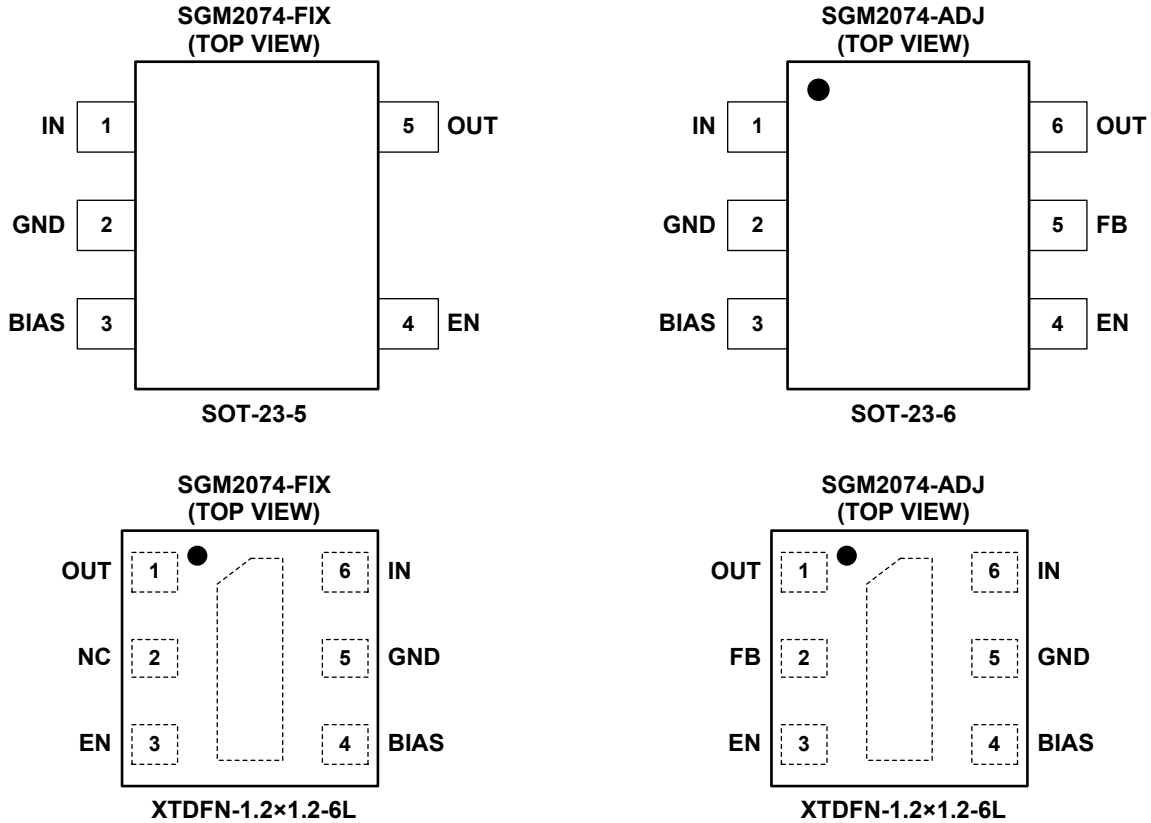

## PIN DESCRIPTION

PIN			NAME	FUNCTION
SOT-23-5	SOT-23-6	XTDFN-1.2x1.2-6L		
1	1	6	IN	Input Supply Voltage Pin. It is recommended to use a 1μF or larger ceramic capacitor from IN pin to ground to get good power supply decoupling. This ceramic capacitor should be placed as close as possible to IN pin.
2	2	5	GND	Ground.
3	3	4	BIAS	Bias Voltage Supply Pin for Internal Control Circuits. It is recommended to use a 0.1μF or larger ceramic capacitor from BIAS pin to ground and this ceramic capacitor should be placed as close as possible to BIAS pin.
4	4	3	EN	Enable Pin. Drive EN high to turn on the regulator. Drive EN low to turn off the regulator. The EN pin has an internal pull-down resistance.
5	6	1	OUT	Regulated Output Pin. It is recommended to use a ceramic capacitor with effective capacitance in the range of 1μF to 100μF to ensure stability. This ceramic capacitor should be placed as close as possible to OUT pin.
–	5	2	FB	Feedback Pin (adjustable voltage version only). Connect this pin to the midpoint of an external resistor divider to adjust the output voltage. Place the resistors as close as possible to this pin.
–	–		NC	No Connection (fixed voltage version).
–	–	Exposed Pad	–	Exposed Pad. Connect it to GND internally. Connect it to a large ground plane to maximize thermal performance. This pad is not an electrical connection point.

# 500mA, Fast Load Transient Response, 1.2V Logic, SGM2074 Low Noise, Low Dropout, Bias Rail CMOS Voltage Regulator

## FUNCTIONAL BLOCK DIAGRAMS

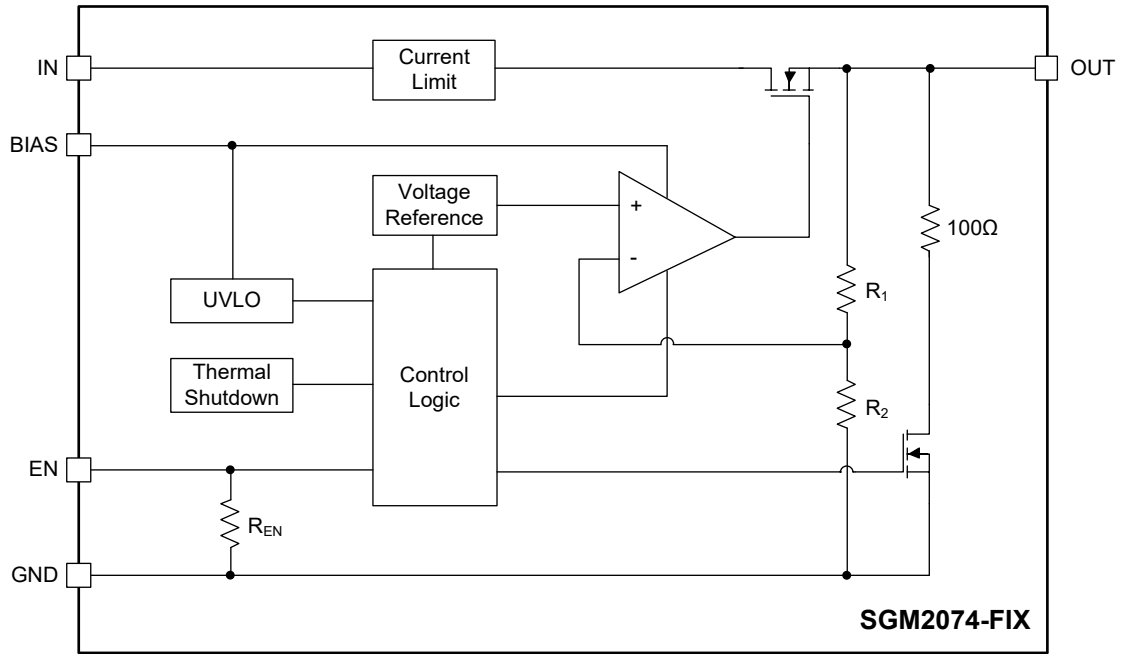


Figure 2. Internal Block Diagram of Fixed Output Voltage

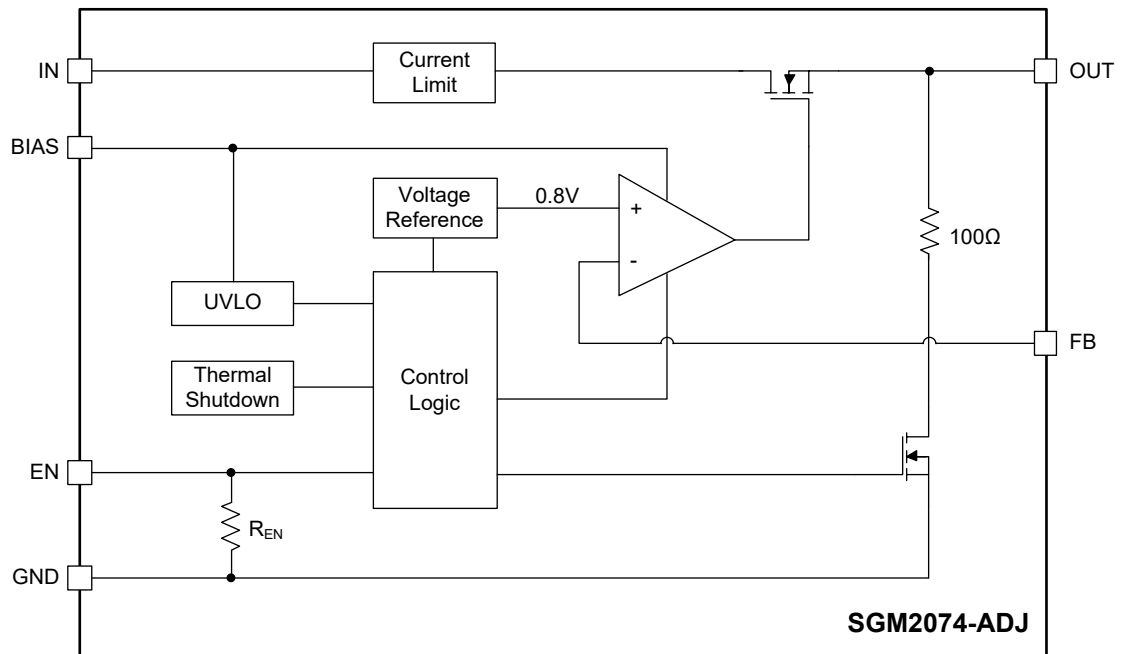


Figure 3. Internal Block Diagram of Adjustable Output Voltage

# 500mA, Fast Load Transient Response, 1.2V Logic, SGM2074 Low Noise, Low Dropout, Bias Rail CMOS Voltage Regulator

## ELECTRICAL CHARACTERISTICS

( $V_{IN} = V_{OUT(NOM)} + 0.3V$ ,  $V_{BIAS} = 2.7V$  or  $(V_{OUT(NOM)} + 1.6V)$  whichever is greater,  $V_{EN} = V_{BIAS}$ ,  $I_{OUT} = 1mA$ ,  $C_{IN} = 1\mu F$ ,  $C_{BIAS} = 0.1\mu F$ ,  $C_{OUT} = 2.2\mu F$ ,  $T_J = -40^\circ C$  to  $+125^\circ C$ , typical values are at  $T_J = +25^\circ C$ , unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS	
Input Supply Voltage Range	$V_{IN}$		$V_{OUT(NOM)} + V_{DROP\_IN}$		5.5	V	
Bias Supply Voltage Range	$V_{BIAS}$		$(V_{OUT(NOM)} + 1.6) \geq 2.5$		5.5	V	
Output Voltage Accuracy	$V_{OUT}$	$V_{BIAS} = 2.5V$ or $(V_{OUT(NOM)} + 1.6V)$ to $5.5V$ , $I_{OUT} = 1mA$ to $500mA$	$T_J = +25^\circ C$	-1	1	%	
			$T_J = -40^\circ C$ to $+125^\circ C$	-1.5	1.2		
Feedback Voltage	$V_{ADJ}$	SGM2074-ADJ, $V_{OUT} = V_{ADJ}$ , $I_{OUT} = 1mA$ to $500mA$	$T_J = +25^\circ C$	0.7920	0.8	0.8080	V
			$T_J = -40^\circ C$ to $+125^\circ C$	0.7880		0.8096	
FB Pin Input Current	$I_{ADJ}$	$V_{ADJ} = 0.9V$	-35		35	nA	
Under-Voltage Lockout Thresholds	$V_{UVLO}$	$V_{BIAS}$ rising		1.58	1.7	V	
		Hysteresis		0.2			
$V_{IN}$ Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	$V_{IN} = (V_{OUT(NOM)} + 0.3V)$ to $5.5V$		0.002	0.03	%/V	
$V_{BIAS}$ Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{BIAS} \times V_{OUT}}$	$V_{BIAS} = 2.5V$ or $(V_{OUT(NOM)} + 1.6V)$ to $5.5V$ , $V_{OUT(NOM)} = 0.8V$ to $1.8V$		0.002	0.03	%/V	
		$V_{BIAS} = (V_{OUT(NOM)} + 1.6V)$ to $5.5V$ , $V_{OUT(NOM)} = 1.8V$ to $3.6V$		0.01	0.1		
Load Regulation	$\Delta V_{OUT}$	$I_{OUT} = 1mA$ to $500mA$	$V_{OUT(NOM)} = 0.8V$ to $1.8V$		0.8	3	mV
			$V_{OUT(NOM)} = 1.8V$ to $3.6V$		1.5	5	
$V_{IN}$ Dropout Voltage	$V_{DROP\_IN}$	$V_{OUT} = 95\% \times V_{OUT(NOM)}$	$I_{OUT} = 150mA$		35	65	mV
			$I_{OUT} = 500mA$		125	220	
$V_{BIAS}$ Dropout Voltage <sup>(1)</sup>	$V_{DROP\_BIAS}$	$V_{OUT} = 95\% \times V_{OUT(NOM)}$ , $I_{OUT} = 500mA$		1.25	1.5	V	
Output Current Limit	$I_{LIMIT}$	$V_{OUT}$ forced at $90\% \times V_{OUT(NOM)}$	520	780	1100	mA	
Short-Circuit Current Limit	$I_{SHORT}$	$V_{OUT} = 0V$		400		mA	
BIAS Pin Operating Current	$I_{BIAS}$	$V_{BIAS} = 5.5V$		88	120	$\mu A$	
BIAS Pin Disable Current	$I_{DIS\_BIAS}$	$V_{EN} = 0V$		0.01	0.5	$\mu A$	
IN Pin Disable Current	$I_{DIS\_IN}$	$V_{EN} = 0V$		0.1	2	$\mu A$	
EN Pin Threshold Voltage	$V_{IH}$	EN input voltage high	0.71		5.5	V	
	$V_{IL}$	EN input voltage low	0		0.46	V	
EN Pin Pull-Down Resistance	$R_{EN}$		350	580	800	k $\Omega$	
Output Discharge Resistance	$R_{DIS}$	$V_{EN} = 0V$ , $V_{OUT} = 0.5V$ , $V_{BIAS} = 5.5V$	60	100	140	$\Omega$	
Turn-On Time	$t_{ON}$	From assertion of $V_{EN}$ to $V_{OUT} = 90\% \times V_{OUT(NOM)}$		90		$\mu s$	
$V_{IN}$ Power Supply Rejection Ratio	PSRR	$V_{IN}$ to $V_{OUT}$ , $f = 1kHz$ , $V_{OUT(NOM)} = 1.2V$ , $I_{OUT} = 150mA$ , $V_{IN} \geq 1.7V$		80		dB	
$V_{BIAS}$ Power Supply Rejection Ratio		$V_{BIAS}$ to $V_{OUT}$ , $f = 1kHz$ , $V_{OUT(NOM)} = 1.2V$ , $I_{OUT} = 150mA$ , $V_{IN} \geq 1.7V$		73			
Output Voltage Noise	$e_n$	$V_{IN} = V_{OUT(NOM)} + 0.5V$ , $V_{OUT(NOM)} = 1.2V$ , $f = 10Hz$ to $100kHz$		31		$\mu V_{RMS}$	
Thermal Shutdown Temperature	$T_{SHDN}$			155		$^\circ C$	
Thermal Shutdown Hysteresis	$\Delta T_{SHDN}$			20		$^\circ C$	







**NOTE:**

1. The  $V_{BIAS}$  dropout voltage is not suitable for output voltages below 1.5V because the minimum bias operating voltage is 2.5V.

# 500mA, Fast Load Transient Response, 1.2V Logic, SGM2074 Low Noise, Low Dropout, Bias Rail CMOS Voltage Regulator

## TYPICAL PERFORMANCE CHARACTERISTICS







$T_J = +25^\circ\text{C}$ ,  $V_{IN} = 1.5\text{V}$ ,  $V_{OUT(NOM)} = 1.2\text{V}$ ,  $V_{EN} = V_{BIAS} = 2.8\text{V}$ ,  $C_{IN} = 1\mu\text{F}$ ,  $C_{BIAS} = 0.1\mu\text{F}$ ,  $C_{OUT} = 2.2\mu\text{F}$ , unless otherwise noted.

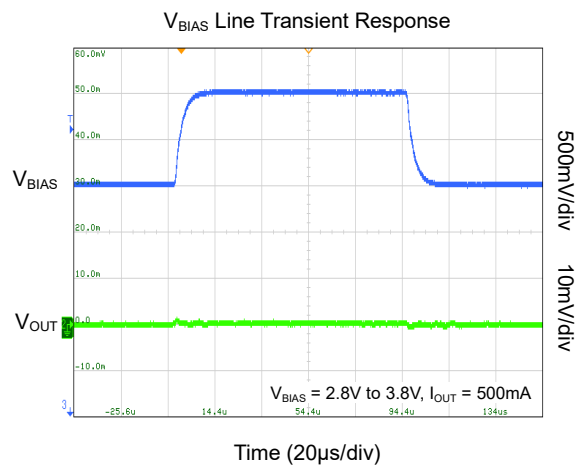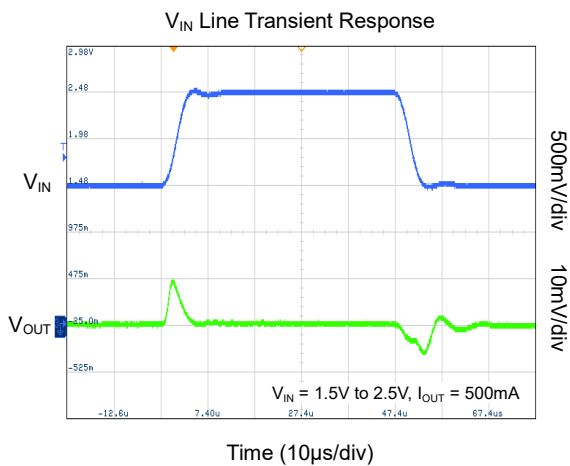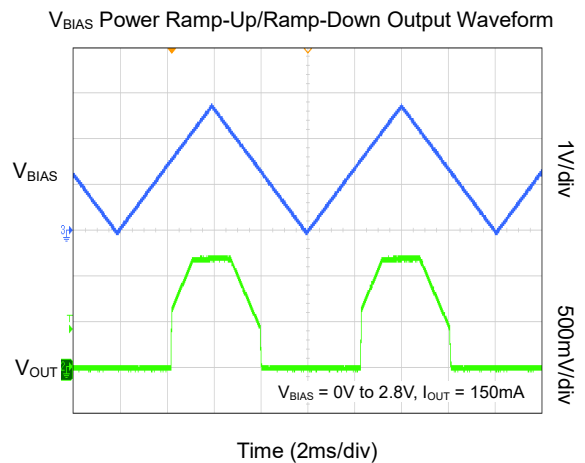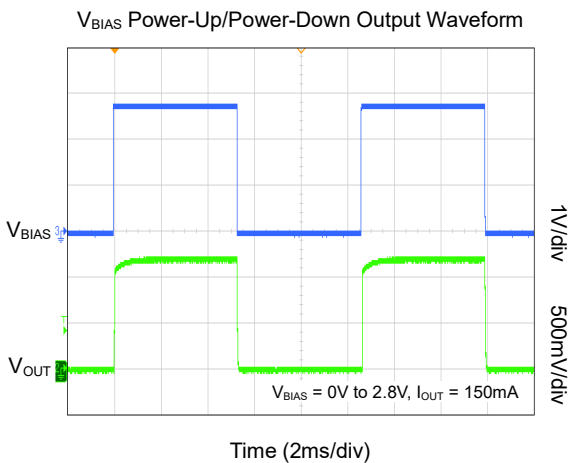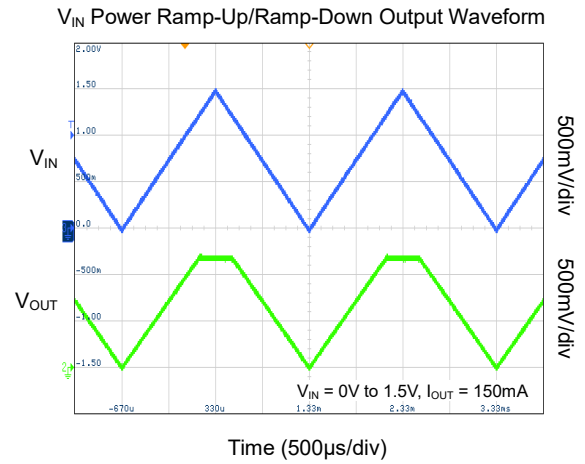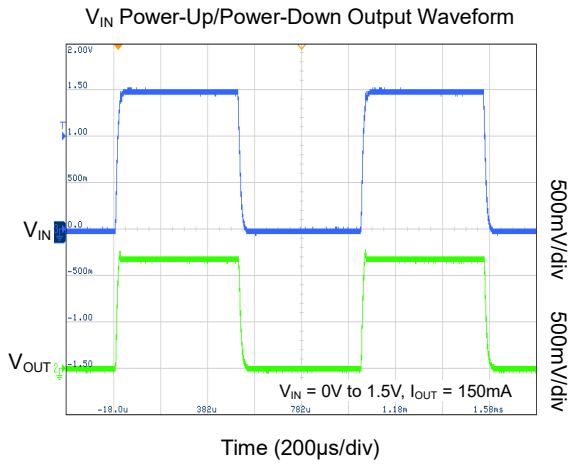

# 500mA, Fast Load Transient Response, 1.2V Logic, SGM2074 Low Noise, Low Dropout, Bias Rail CMOS Voltage Regulator

## TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$T_J = +25^\circ\text{C}$ ,  $V_{IN} = 1.5\text{V}$ ,  $V_{OUT(NOM)} = 1.2\text{V}$ ,  $V_{EN} = V_{BIAS} = 2.8\text{V}$ ,  $C_{IN} = 1\mu\text{F}$ ,  $C_{BIAS} = 0.1\mu\text{F}$ ,  $C_{OUT} = 2.2\mu\text{F}$ , unless otherwise noted.

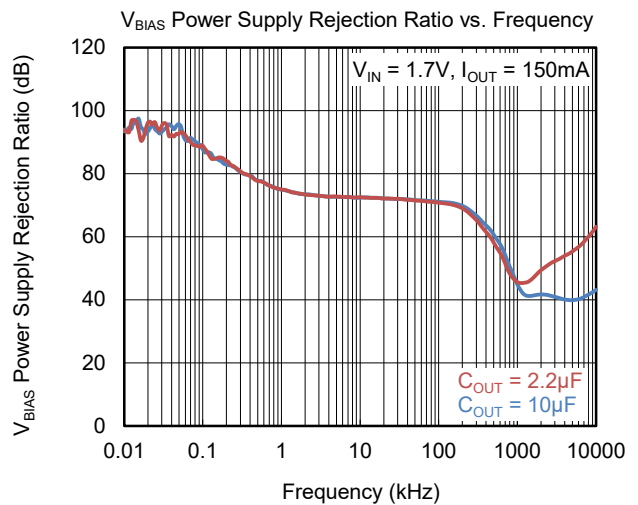
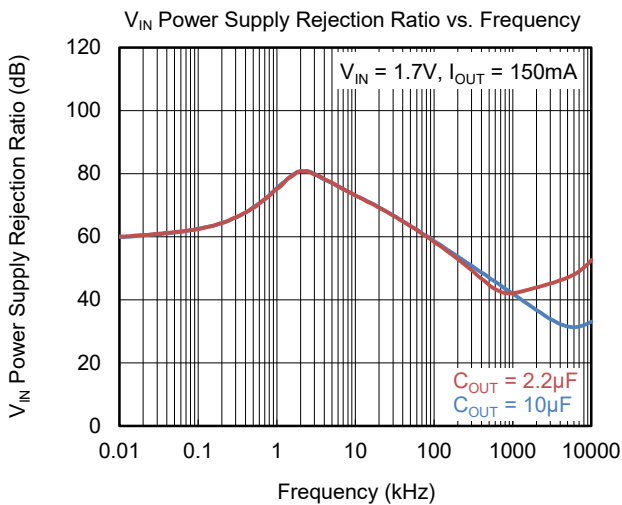
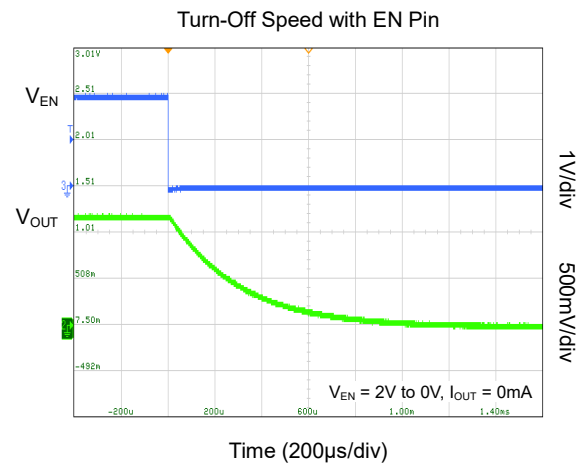
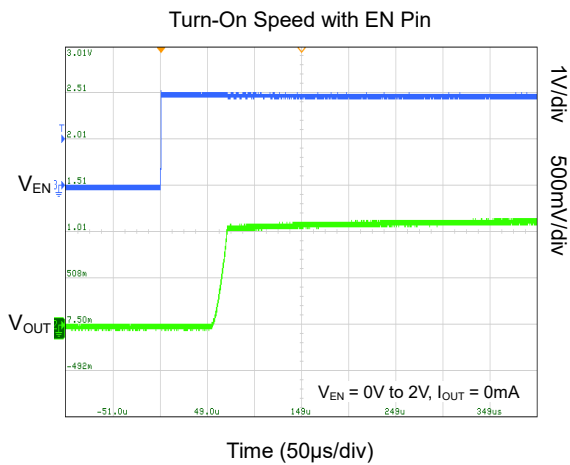
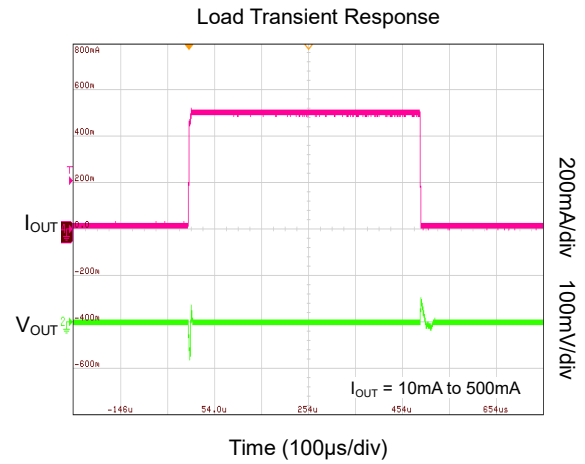
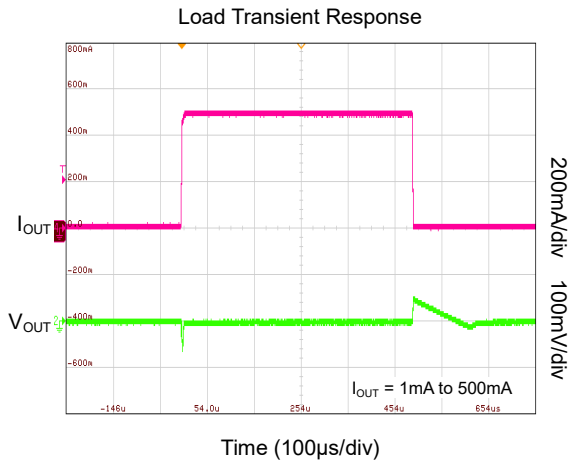




# 500mA, Fast Load Transient Response, 1.2V Logic, SGM2074 Low Noise, Low Dropout, Bias Rail CMOS Voltage Regulator

## TYPICAL PERFORMANCE CHARACTERISTICS (continued)







$T_J = +25^\circ\text{C}$ ,  $V_{IN} = 1.5\text{V}$ ,  $V_{OUT(NOM)} = 1.2\text{V}$ ,  $V_{EN} = V_{BIAS} = 2.8\text{V}$ ,  $C_{IN} = 1\mu\text{F}$ ,  $C_{BIAS} = 0.1\mu\text{F}$ ,  $C_{OUT} = 2.2\mu\text{F}$ , unless otherwise noted.

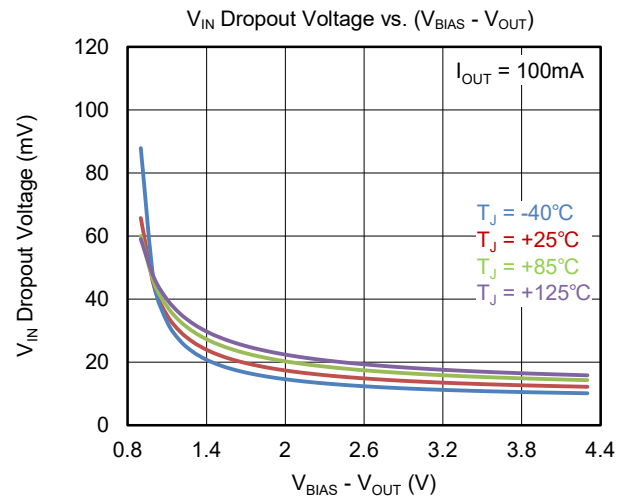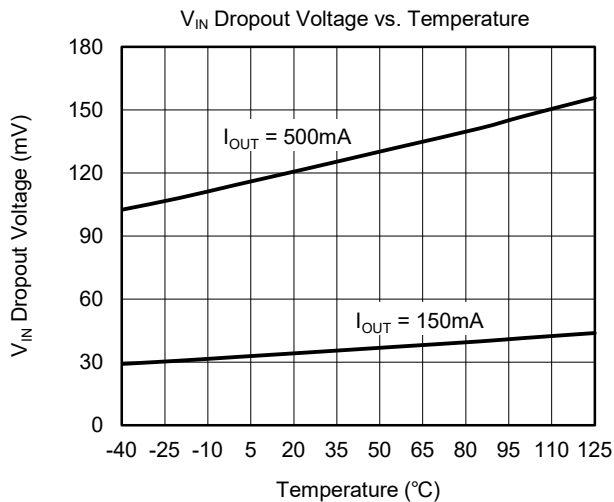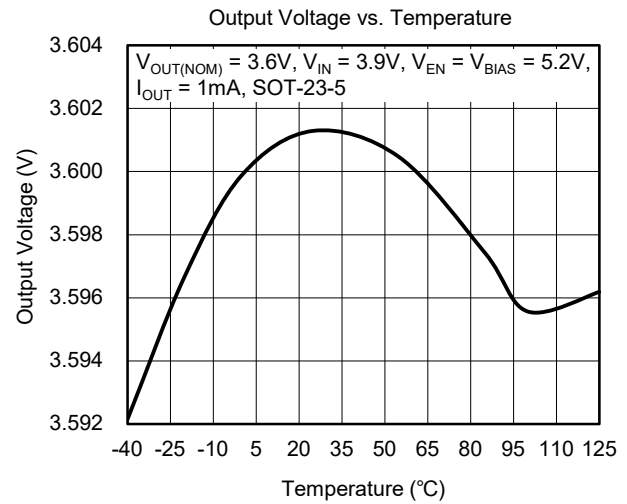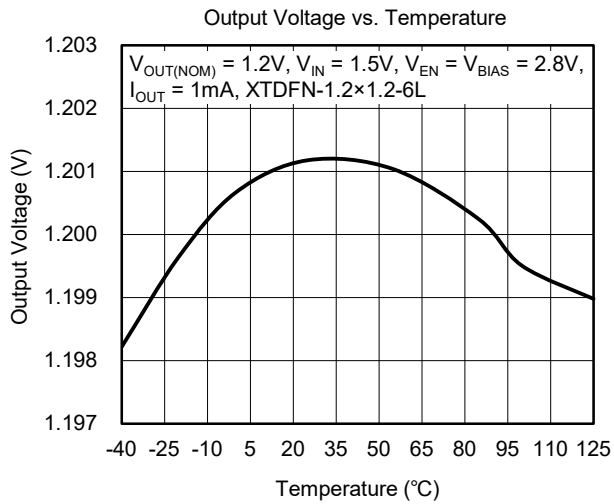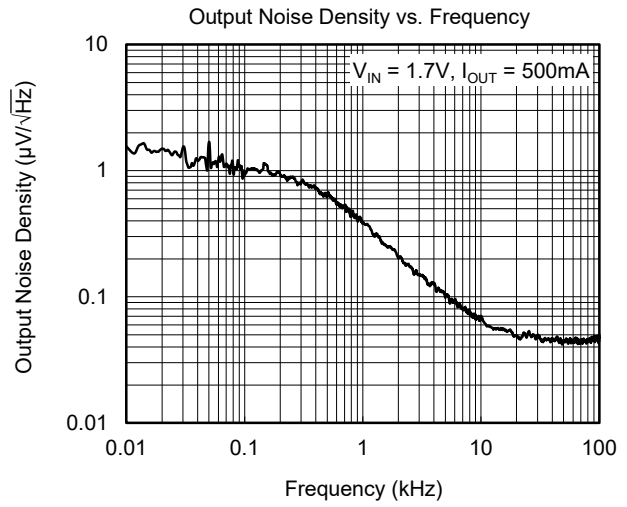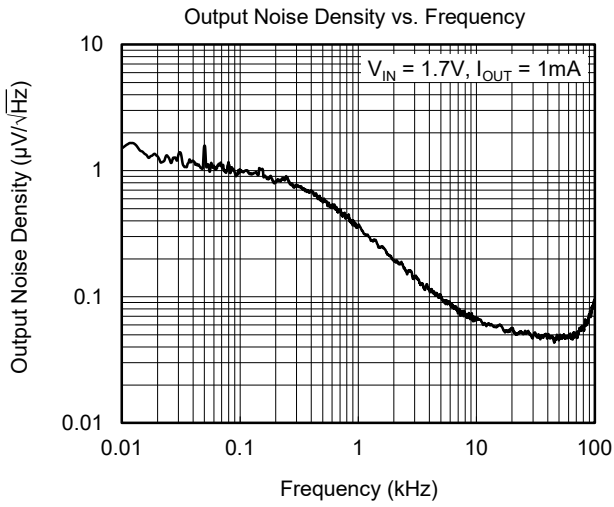

# 500mA, Fast Load Transient Response, 1.2V Logic, SGM2074 Low Noise, Low Dropout, Bias Rail CMOS Voltage Regulator

## TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$T_J = +25^\circ\text{C}$ ,  $V_{IN} = 1.5\text{V}$ ,  $V_{OUT(NOM)} = 1.2\text{V}$ ,  $V_{EN} = V_{BIAS} = 2.8\text{V}$ ,  $C_{IN} = 1\mu\text{F}$ ,  $C_{BIAS} = 0.1\mu\text{F}$ ,  $C_{OUT} = 2.2\mu\text{F}$ , unless otherwise noted.

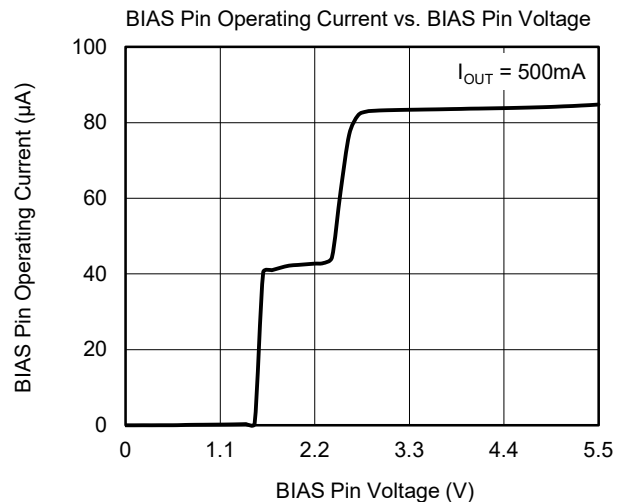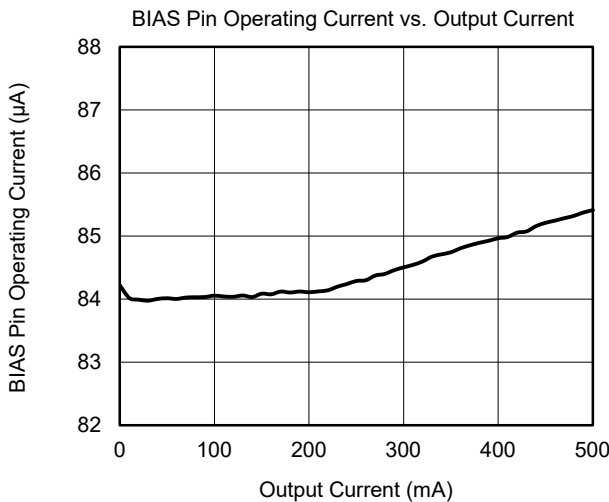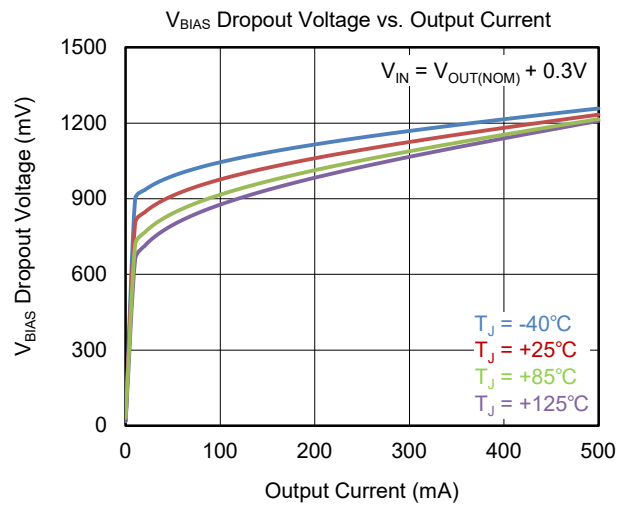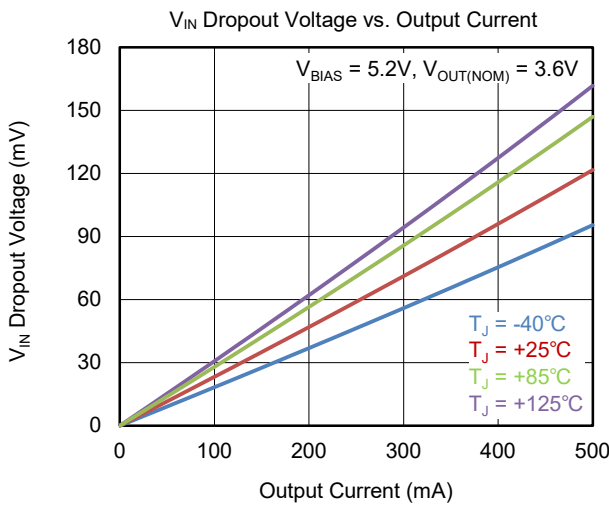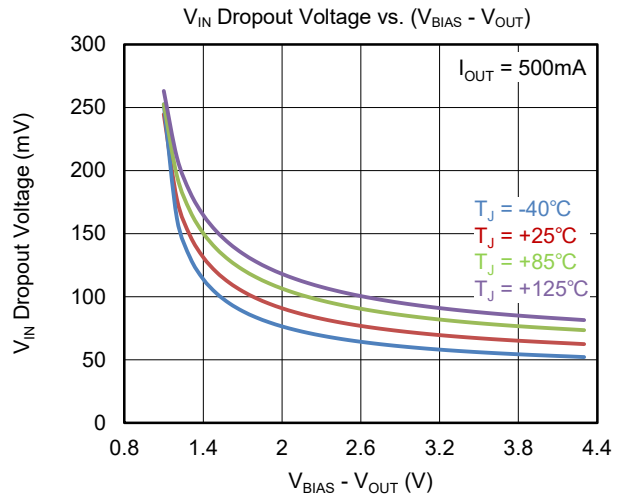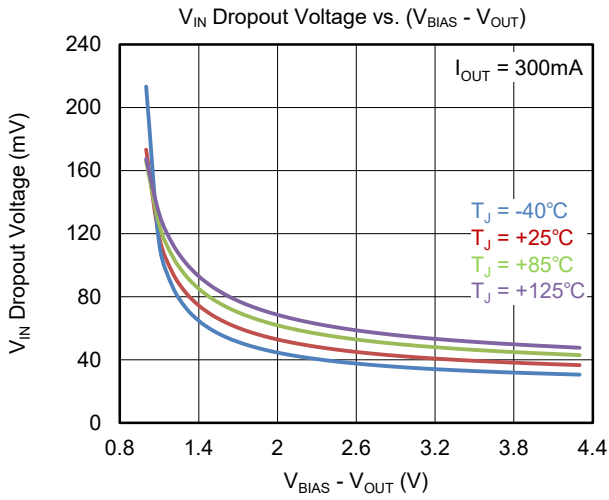

# 500mA, Fast Load Transient Response, 1.2V Logic, SGM2074 Low Noise, Low Dropout, Bias Rail CMOS Voltage Regulator

## APPLICATION INFORMATION

The SGM2074 is a low noise and low dropout LDO with fast transient response and provides 500mA output current. These features make the device a reliable solution to solve many challenging problems in the generation of clean and accurate power supply. The high performance also makes the SGM2074 useful in a variety of applications. The SGM2074 provides protection functions for output overload, output short-circuit condition and overheating.

The SGM2074 provides an EN pin as an external chip enable control to enable/disable the device. When the regulator is in shutdown state, the shutdown current consumes as low as 0.01 $\mu$ A (TYP).

### Input Capacitor Selection ( $C_{IN}$ and $C_{BIAS}$ )

The input decoupling capacitors should be placed as close as possible to the IN pin and BIAS pin to ensure the device stability.  $C_{IN} = 1\mu$ F and  $C_{BIAS} = 0.1\mu$ F or larger X7R or X5R ceramic capacitors are selected to get good dynamic performance.

When  $V_{IN}$  is required to provide large current instantaneously, a large effective input capacitor is required. Multiple input capacitors can limit the input tracking inductance. Adding more input capacitors is available to restrict the ringing and to keep it below the device absolute maximum ratings. For  $C_{OUT}$  with larger capacitance, it is recommended to choose the larger capacitance  $C_{IN}$ .

### Output Capacitor Selection ( $C_{OUT}$ )

The output capacitor should be placed as close as possible to the OUT pin.  $1\mu$ F or larger X7R or X5R ceramic capacitor is selected to get good dynamic performance. The minimum effective capacitance of  $C_{OUT}$  that SGM2074 can remain stable is  $1\mu$ F. For ceramic capacitor, temperature, DC bias and package size will change the effective capacitance, so enough margin of  $C_{OUT}$  must be considered in design. Additionally,  $C_{OUT}$  with larger capacitance and lower ESR will help increase the high frequency PSRR and improve the load transient response.

### Dropout Voltage

The SGM2074 specifies two dropout voltages because there are two power supplies  $V_{IN}$  and  $V_{BIAS}$  and one  $V_{OUT}$  regulator output.  $V_{IN}$  dropout voltage is defined as the difference between  $V_{IN}$  and  $V_{OUT}$  when  $V_{OUT}$  falls 5%

below  $V_{OUT(NOM)}$ . When the output voltage is lower than 1.5V,  $V_{BIAS}$  dropout voltage is not applicable because the minimum bias operating voltage is 2.5V.

When  $V_{OUT}$  begins to decrease and  $V_{BIAS}$  is high enough, the  $V_{IN}$  dropout voltage equals to  $V_{IN} - V_{OUT}$ .  $V_{BIAS}$  dropout voltage refers to  $V_{BIAS} - V_{OUT}$  when the IN and BIAS pins are connected together and  $V_{OUT}$  begins to decrease.

### Adjustable Regulator

The output voltage of the SGM2074-ADJ can be adjusted from 0.8V to 3.6V. The FB pin will be connected to two external resistors as shown in Figure 4. The output voltage is determined by the following equation:

$$V_{OUT} = V_{ADJ} \times \left( 1 + \frac{R_1}{R_2} \right) \quad (1)$$

where:

$V_{OUT}$  is output voltage and  $V_{ADJ}$  is the internal voltage reference,  $V_{ADJ} = 0.8V$ . Choose  $R_2 = 40k\Omega$  to maintain a 20 $\mu$ A minimum load.

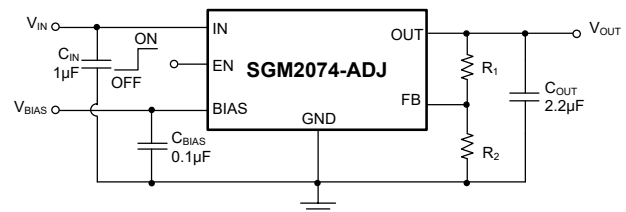


Figure 4. Adjustable Output Voltage Application

### Enable Operation

The SGM2074 uses the EN pin to enable/disable the device and to deactivate/activate the output automatic discharge function.

When the EN pin voltage is lower than 0.46V, the device is in shutdown state. There is no current flowing from IN pin to OUT pin. In this state, the automatic discharge transistor is active to discharge the output voltage through a 100 $\Omega$  (TYP) resistor.

When the EN pin voltage is higher than 0.71V, the device is in active state. The output voltage is regulated to the expected value and the automatic discharge transistor is turned off.

# 500mA, Fast Load Transient Response, 1.2V Logic, SGM2074 Low Noise, Low Dropout, Bias Rail CMOS Voltage Regulator

## APPLICATION INFORMATION (continued)

### Reverse Current Protection

The NMOS power transistor has an inherent body diode, this body diode will be forward biased when  $V_{OUT} > V_{IN}$ . When  $V_{OUT} > V_{IN}$ , the reverse current flowing from the OUT pin to the IN pin will damage the SGM2074. If  $V_{OUT} > (V_{IN} + 0.3V)$  is expected in the application, one external Schottky diode will be added between the OUT pin and IN pin to protect the SGM2074.

### Negatively Biased Output

When the output voltage is negative, the chip may not start up due to parasitic effects. Ensure that the output is greater than -0.3V under all conditions. If negatively biased output is excessive and expected in the application, a Schottky diode can be added between the OUT pin and GND pin.

### Output Current Limit and Short-Circuit Protection

When overload events happen, the output current is internally limited to 780mA (TYP). When the OUT pin is shorted to ground, the short-circuit protection will limit the output current to 400mA (TYP).

### Thermal Shutdown

When the die temperature exceeds the threshold value of thermal shutdown, the SGM2074 will be in shutdown state and it will remain in this state until the die temperature decreases to +135°C.

### Power Dissipation ( $P_D$ )

Power dissipation ( $P_D$ ) of the SGM2074 can be calculated by the equation  $P_D = (V_{IN} - V_{OUT}) \times I_{OUT}$ . The maximum allowable power dissipation ( $P_{D(MAX)}$ ) of the SGM2074 is affected by many factors, including the difference between junction temperature and ambient temperature ( $T_{J(MAX)} - T_A$ ), package thermal resistance from the junction to the ambient environment ( $\theta_{JA}$ ), the rate of ambient airflow and PCB layout.  $P_{D(MAX)}$  can be approximated by the following equation:

$$P_{D(MAX)} = (T_{J(MAX)} - T_A) / \theta_{JA} \quad (2)$$

The power dissipation must be less than 1.6W for the device protection. For example, when output is short to GND, the short current is about 0.4A and the input voltage must be less than 4V, otherwise the SGM2074 may be damaged.

## REVISION HISTORY



NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Original (MAY 2024) to REV.A	Page
Changed from product preview to production data.....	All



# PACKAGE INFORMATION

## PACKAGE OUTLINE DIMENSIONS

### SOT-23-5

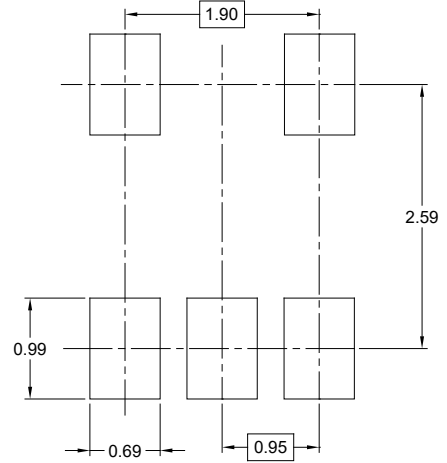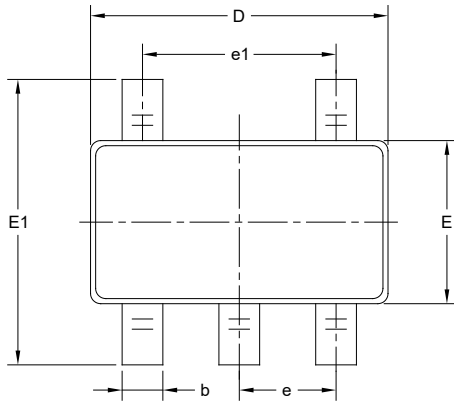

RECOMMENDED LAND PATTERN (Unit: mm)

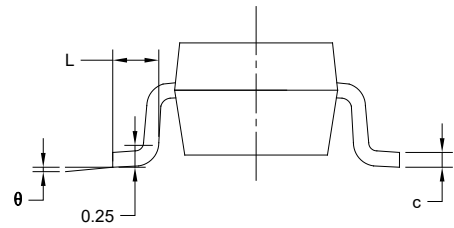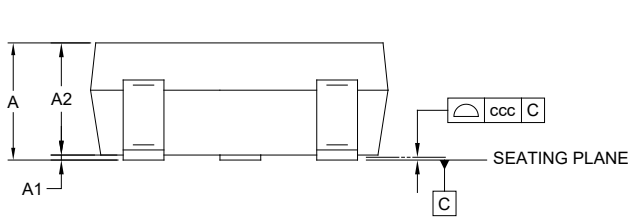



Symbol	Dimensions In Millimeters		
	MIN	MOD	MAX
A	-	-	1.450
A1	0.000	-	0.150
A2	0.900	-	1.300
b	0.300	-	0.500
c	0.080	-	0.220
D	2.750	-	3.050
E	1.450	-	1.750
E1	2.600	-	3.000
e	0.950 BSC		
e1	1.900 BSC		
L	0.300	-	0.600
$\theta$	0°	-	8°
ccc	0.100		

NOTES:


1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.
3. Reference JEDEC MO-178.

PACKAGE OUTLINE DIMENSIONS

SOT-23-6

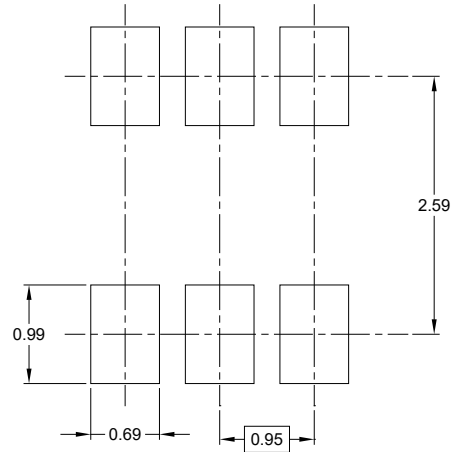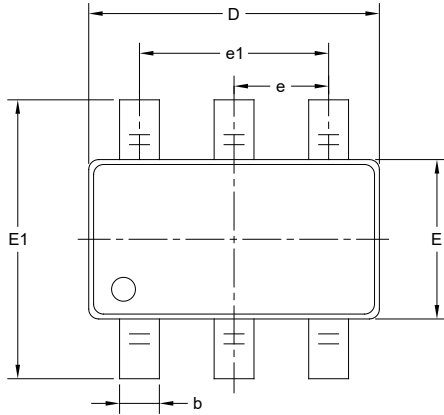

RECOMMENDED LAND PATTERN (Unit: mm)

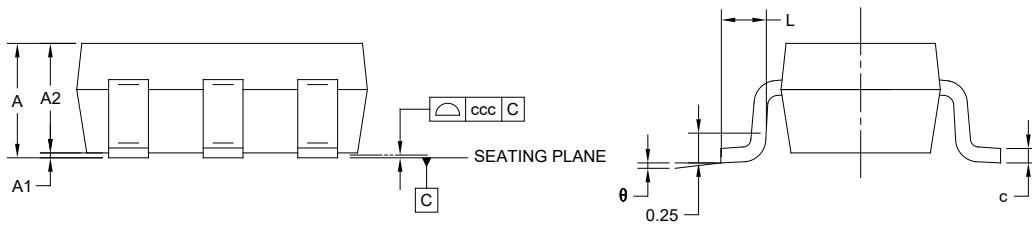


Symbol	Dimensions In Millimeters		
	MIN	MOD	MAX
A	-	-	1.450
A1	0.000	-	0.150
A2	0.900	-	1.300
b	0.300	-	0.500
c	0.080	-	0.220
D	2.750	-	3.050
E	1.450	-	1.750
E1	2.600	-	3.000
e	0.950 BSC		
e1	1.900 BSC		
L	0.300	-	0.600
$\theta$	0°	-	8°
ccc	0.100		

NOTES:


1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.
3. Reference JEDEC MO-178.

PACKAGE OUTLINE DIMENSIONS


XTDFN-1.2x1.2-6L

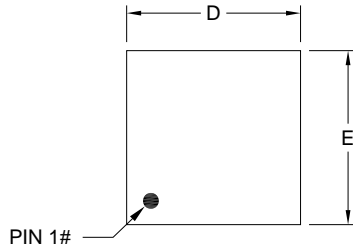


TOP VIEW



BOTTOM VIEW

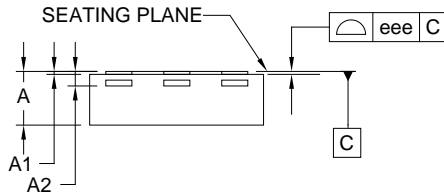

SIDE VIEW

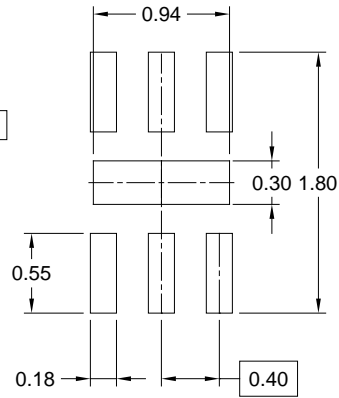

RECOMMENDED LAND PATTERN (Unit: mm)

Symbol	Dimensions In Millimeters		
	MIN	MOD	MAX
A	0.340	0.370	0.400
A1	0.000	-	0.050
A2	0.100 REF		
b	0.130	0.180	0.230
D	1.100	1.200	1.300
E	1.100	1.200	1.300
D1	0.890	0.940	0.990
E1	0.250	0.300	0.350
e	0.300	0.400	0.500
k	0.110 REF		
k1	0.150	0.200	0.250
L	0.150	0.200	0.250
L1	0.000	0.050	0.100
eee	0.080		

NOTE: This drawing is subject to change without notice.

# PACKAGE INFORMATION

## TAPE AND REEL INFORMATION

### REEL DIMENSIONS



### TAPE DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

### KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOT-23-5	7"	9.5	3.20	3.20	1.40	4.0	4.0	2.0	8.0	Q3
SOT-23-6	7"	9.5	3.23	3.17	1.37	4.0	4.0	2.0	8.0	Q3
XTDFN-1.2×1.2-6L	7"	9.5	1.37	1.37	0.55	4.0	4.0	2.0	8.0	Q1

DD0001



# PACKAGE INFORMATION

## CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

## KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002