

### GENERAL DESCRIPTION

The SGM6037 is a family of high power density synchronous Buck converters which are capable of delivering up to 6A continuous output current from 2.4V to 5.5V input voltage range. The device only consumes 5µA (TYP) quiescent current.

The SGM6037 implements an I<sup>2</sup>C interface to further enhance the device's flexibility and ease of use to adapt for various application needs. The device implements auto PFM mode operation to maximize the efficiency at light load condition. At moderate to heavy load, the device automatically switches to CCM operation with a 2.3MHz (TYP) switching frequency. FPWM operation is also available via I<sup>2</sup>C programming for low output voltage ripple requirement.

The SGM6037 implements the constant on-time (COT) architecture that incorporates the benefits of fast load and line transient response and low output voltage ripple, which is beneficial for RF and noise sensitive applications.

The SGM6037 family of devices offers VID option for dynamic voltage scaling (DVS) via the I<sup>2</sup>C interface, which can adjust the output voltage rapidly to adapt for any changes on the load side. Another variant of the device offers an active-low power good (PG) function.

The SGM6037 is available in a Green WLCSP-1.05×1.78-15B package.

### APPLICATIONS

- Core Supply for FPGAs, CPUs, ASICs or GPUs
- DDR Memory
- Optical Modules
- Solid-State Drives

### FEATURES

- 2.4V to 5.5V Input Voltage Range
- 5µA (TYP) Quiescent Current
- 2.3MHz (TYP) Switching Frequency
- 2% Output Voltage Accuracy
- 15mΩ and 9.8mΩ Internal Power MOSFETs
- >90% Efficiency at 0.9V Output
- COT-Control Architecture for Fast Transient Response
- Output Current:
  - ♦ SGM6037A: 4A (VSET/VID Pin)
  - ♦ SGM6037B: 4A (VSET/nPG Pin)
  - ♦ SGM6037C: 6A (VSET/VID Pin)
  - ♦ SGM6037D: 6A (VSET/nPG Pin)
- Selection by External Resistor
  - ♦ I<sup>2</sup>C Slave Address
  - ♦ Start-up Output Voltage
- Selection by I<sup>2</sup>C Interface
  - ♦ Output Discharge
  - ♦ Output Voltage Ramp Speed
  - ♦ Power-Save Mode or Forced PWM Mode
  - ♦ Hiccup or Latching Short-Circuit Protection
- VID Option for Dynamic Voltage Scaling (DVS)
- Thermal Warning and Shutdown
- Power Good Indicator Pin Option
- Up to 3.4Mbps I<sup>2</sup>C Compatible Interface
- Available in a Green WLCSP-1.05×1.78-15B Package

### TYPICAL APPLICATION

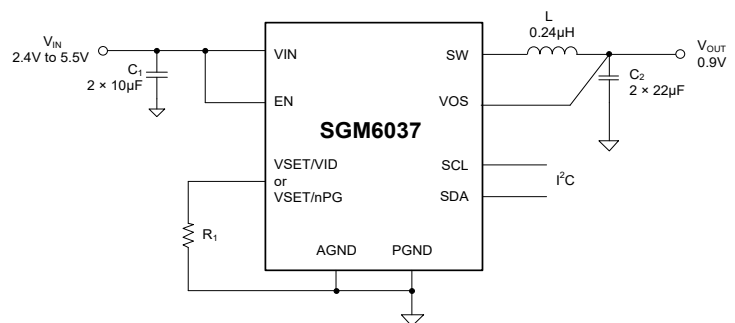



Figure 1. Typical Application Circuit

**PACKAGE/ORDERING INFORMATION**

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM6037A	WLCSP-1.05×1.78-15B	-40°C to +125°C	SGM6037AXG/TR	XXXXXX 6037A	Tape and Reel, 3500
SGM6037B	WLCSP-1.05×1.78-15B	-40°C to +125°C	SGM6037BXG/TR	XXXXXX 6037B	Tape and Reel, 3500
SGM6037C	WLCSP-1.05×1.78-15B	-40°C to +125°C	SGM6037CXG/TR	XXXXXX 6037C	Tape and Reel, 3500
SGM6037D	WLCSP-1.05×1.78-15B	-40°C to +125°C	SGM6037DXG/TR	XXXXXX 6037D	Tape and Reel, 3500

**MARKING INFORMATION**

NOTE: XXXXX = Date Code, Trace Code and Vendor Code.

**XXXXX**

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

**DEVICE DESCRIPTION**

Part Number	Start-up Output Voltage	Output Current	VSET/VID or VSET/nPG Pin
SGM6037A	0.4V to 1.15V, Selectable	4A	VSET/VID
SGM6037B			VSET/nPG
SGM6037C		6A	VSET/VID
SGM6037D			VSET/nPG

# 2.4V to 5.5V Input, 4A/6A Synchronous Buck Converter with I<sup>2</sup>C Interface

## SGM6037

### ABSOLUTE MAXIMUM RATINGS

Supply Voltage, $V_{IN}$ .....	-0.3V to 6V
EN, SDA, SCL, VOS Voltages.....	-0.3V to 6V
VSET/VID, VSET/nPG Voltages.....	-0.3V to 6V
SW, DC Voltages.....	-0.3V to $V_{IN} + 0.3V$
SW, AC (10ns Transient), while switching.....	-2.5V to 10V
Source Current at VSET/nPG, $I_{SOURCE\_nPG}$ .....	1mA
Sink Current at SDA, SCL, $I_{SINK\_SDA/SCL}$ .....	2mA
Package Thermal Resistance	
WLCSP-1.05×1.78-15B, $\theta_{JA}$ .....	63.2°C/W
WLCSP-1.05×1.78-15B, $\theta_{JB}$ .....	16.5°C/W
WLCSP-1.05×1.78-15B, $\theta_{JC}$ .....	32.5°C/W
Operating Junction Temperature.....	-40°C to +150°C
Storage Temperature Range.....	-65°C to +150°C
Lead Temperature (Soldering, 10s).....	+260°C
ESD Susceptibility <sup>(1) (2)</sup>	
HBM.....	±2000V
CDM.....	±1000V

#### NOTES:

1. For human body model (HBM), all pins comply with ANSI/ESDA/JEDEC JS-001 specifications.
2. For charged device model (CDM), all pins comply with ANSI/ESDA/JEDEC JS-002 specifications.

### RECOMMENDED OPERATING CONDITIONS

Supply Voltage, $V_{IN}$ .....	2.4V to 5.5V
Falling Transition Time at VIN Pin, $t_{VIN\_F}$ <sup>(1)</sup> .....	10mV/ $\mu$ s
SGM6037A/B: Output Current, $I_{OUT}$ <sup>(2)</sup> .....	0A to 4A
SGM6037C/D: Output Current, $I_{OUT}$ <sup>(3)</sup> .....	0A to 6A
Operating Junction Temperature.....	-40°C to +125°C
Operating Ambient Temperature.....	-40°C to +125°C

#### NOTES:

1. The falling slew rate of  $V_{IN}$  should be limited if  $V_{IN}$  goes below  $V_{UVLO}$ .
2. Lifetime is reduced when operating continuously at 4A output current and the junction temperature is higher than +105°C.
3. Lifetime is reduced when operating continuously at 6A output current and the junction temperature is higher than +85°C.

### OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

### ESD SENSITIVITY CAUTION


This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

### DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.


PIN CONFIGURATIONS

SGM6037A/C (TOP VIEW)

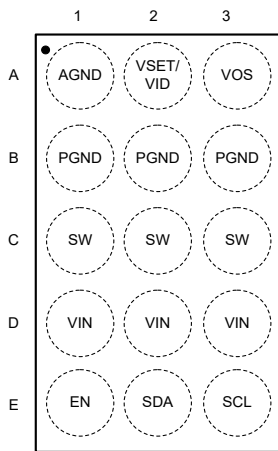

WLCSP-1.05x1.78-15B

SGM6037B/D (TOP VIEW)

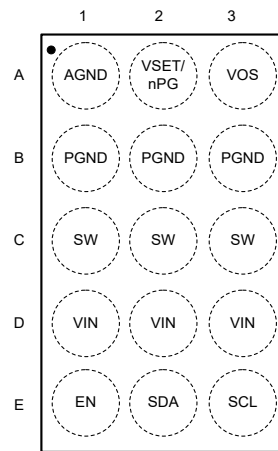

WLCSP-1.05x1.78-15B

PIN DESCRIPTION

PIN	NAME	TYPE	FUNCTION
A1	AGND	G	Analog Ground Pin.
A2	SGM6037A/C VSET/VID	I/O	I <sup>2</sup> C Address Selection and Start-up Voltage Selection Pin. An external resistor connected to this pin programs the start-up voltage. Logic low selects the VOUT register 1 ( <b>REG0x01</b> ), and logic high selects the VOUT register 2 ( <b>REG0x02</b> ).
	SGM6037B/D VSET/nPG	I/O	I <sup>2</sup> C Address Selection and Start-up Voltage Selection Pin. An external resistor connected to this pin programs the start-up voltage. After start-up, this pin is an active-low power good pin. When output voltage is within regulation, this pin is pulled low through the external resistor.
A3	VOS	P	Output Voltage Sense Input. This pin is internally connected to the feedback loop and a MOSFET to discharge the output (V <sub>OUT</sub> ) when the device is disabled. Connect it with a short trace to the output capacitor.
B1, B2, B3	PGND	G	Power Ground Pin.
C1, C2, C3	SW	P	Switching Node Pin. This pin is connected to the internal MOSFET switches. Connect the inductor to this terminal.
D1, D2, D3	VIN	P	Power Supply Input. Connect a ceramic capacitor (C <sub>IN</sub> ) close to this pin and PGND.
E1	EN	I	Device Enable Pin. Logic high on this pin enables the device, and logic low on this pin disables the device. Do not leave it floating.
E2	SDA	I/O	I <sup>2</sup> C Bus Data Signal. Do not leave it floating. Connect it to AGND if not used.
E3	SCL	I	I <sup>2</sup> C Bus Clock Signal. Do not leave it floating. Connect it to AGND if not used.

NOTE: I = input, O = output, I/O = input/output, P = power, G = ground.

**ELECTRICAL CHARACTERISTICS**(T<sub>J</sub> = -40°C to +125°C, V<sub>IN</sub> = 2.4V to 5.5V, all typical values are measured at T<sub>J</sub> = +25°C and V<sub>IN</sub> = 3.7V, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
<b>Supply</b>						
Quiescent Current	I <sub>Q</sub>	EN = High, no load, device not switching		5	15.5	μA
Shutdown Current	I <sub>SD</sub>	T <sub>J</sub> = -40°C to +85°C, EN = low		0.1	1.7	μA
Under-Voltage Lockout Threshold	V <sub>UVLO</sub>	V <sub>IN</sub> rising	2.0	2.2	2.4	V
		V <sub>IN</sub> falling	1.9	2.1	2.3	
Thermal Warning Threshold	T <sub>JW</sub>	T <sub>J</sub> rising		130		°C
Thermal Warning Hysteresis		T <sub>J</sub> falling		20		
Thermal Shutdown Threshold	T <sub>SD</sub>	T <sub>J</sub> rising		150		°C
Thermal Shutdown Hysteresis		T <sub>J</sub> falling		20		
<b>Logic Interface EN, SDA, SCL</b>						
High-Level Input Threshold Voltage at EN, SCL, SDA, VSET/VID	V <sub>IH</sub>		0.9			V
Low-Level Input Threshold Voltage at EN, SCL, SDA, VSET/VID	V <sub>IL</sub>				0.3	V
Input Leakage Current into SCL Pin	I <sub>SCL_LKG</sub>			0.01	0.26	μA
Input Leakage Current into SDA Pin	I <sub>SDA_LKG</sub>			0.01	0.26	μA
Input Leakage Current into EN Pin	I <sub>EN_LKG</sub>			0.03	0.30	μA
Parasitic Capacitance at SCL	C <sub>SCL</sub>			1		pF
Parasitic Capacitance at SDA	C <sub>SDA</sub>			2		pF
<b>Start-up, Power Good</b>						
Enable Delay Time	t <sub>DELAY</sub>	Time from EN high to device starts switching, R <sub>1</sub> = 249kΩ	340	640	950	μs
Output Voltage Ramp Time	t <sub>RAMP</sub>	Time from device starts switching to power good	0.65	1.3	1.8	ms
Power Good Lower Threshold	V <sub>PG</sub>	V <sub>VOS</sub> referenced to V <sub>OUT</sub> nominal	85	91	97	%
Power Good Upper Threshold		V <sub>VOS</sub> referenced to V <sub>OUT</sub> nominal	105	111	118	
Power Good Deglitch Delay	t <sub>PG_DLY</sub>	Rising and falling edges		48		μs
<b>Output</b>						
Output Voltage Accuracy	V <sub>OUT</sub>	T <sub>J</sub> = -40°C to +125°C, V <sub>OUT</sub> ≥ 1.15V, FPWM, no Load	-2.0		2.0	%
		T <sub>J</sub> = -40°C to +125°C, 0.9V ≤ V <sub>OUT</sub> < 1.15V, FPWM, no Load	-2.3		2.3	
		T <sub>J</sub> = -40°C to +125°C, 0.59V ≤ V <sub>OUT</sub> < 0.9V, FPWM, no Load	-3.3		3.3	
		T <sub>J</sub> = -40°C to +125°C, V <sub>OUT</sub> < 0.59V, FPWM, no Load	-4.8		4.8	
Input Leakage Current into VOS Pin	I <sub>VOS_LKG</sub>	EN = high, V <sub>VOS</sub> = 1.8V		1		μA
		EN = low, output discharge disabled, V <sub>VOS</sub> = 1.8V		0.1	0.5	
Output Discharge Resistor at VOS Pin	R <sub>DIS</sub>			17	25	Ω
Load Regulation		V <sub>OUT</sub> = 0.9V, FPWM		0.18		%/A

**ELECTRICAL CHARACTERISTICS (continued)**

(T<sub>J</sub> = -40°C to +125°C, V<sub>IN</sub> = 2.4V to 5.5V, all typical values are measured at T<sub>J</sub> = +25°C and V<sub>IN</sub> = 3.7V, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
<b>Power Switch</b>						
High-side FET On-Resistance	R <sub>DSON</sub>			15		mΩ
Low-side FET On-Resistance				9.8		
High-side FET Forward Current Limit (Initialization)	I <sub>LIM</sub>	SGM6037A and SGM6037B	5.2	6.5	7.8	A
		SGM6037C and SGM6037D	6.7	8.5	10.0	
Low-side FET Forward Current Limit		SGM6037A and SGM6037B		5.3		
		SGM6037C and SGM6037D		7.2		
Low-side FET Negative Current Limit		SGM6037A, SGM6037B, SGM6037C and SGM6037D		-2.4		
PWM Switching Frequency		f <sub>SW</sub>	I <sub>OUT</sub> = 1A, V <sub>OUT</sub> = 0.9V		2.3	

I<sup>2</sup>C INTERFACE TIMING CHARACTERISTICS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
SCL Clock Frequency	f <sub>SCL</sub>	Standard mode			100	kHz
		Fast mode			400	kHz
		Fast mode plus			1	MHz
		High-speed mode (write operation), CB - 100pF(MAX)			3.4	MHz
		High-speed mode (read operation), CB - 10pF(MAX)			3.4	MHz
		High-speed mode (write operation), CB - 400pF(MAX)			1.7	MHz
		High-speed mode (read operation), CB - 400pF(MAX)			1.7	MHz
Bus Free Time between a Stop and Start Condition	t <sub>BUF</sub>	Standard mode	4.7			μs
		Fast mode	1.3			μs
		Fast mode plus	0.5			μs
Hold Time (Repeated) Start Condition	t <sub>HD</sub> , t <sub>STA</sub>	Standard mode	4			μs
		Fast mode	600			ns
		Fast mode plus	260			ns
		High-speed mode	160			ns
Low Period of the SCL Clock	t <sub>LOW</sub>	Standard mode	4.7			μs
		Fast mode	1.3			μs
		Fast mode plus	0.5			μs
		High-speed mode, CB - 100pF(MAX)	160			ns
		High-speed mode, CB - 400pF(MAX)	320			ns
High Period of the SCL Clock	t <sub>HIGH</sub>	Standard mode	4			μs
		Fast mode	600			ns
		Fast mode plus	260			ns
		High-speed mode, CB - 100pF(MAX)	60			ns
		High-speed mode, CB - 400pF(MAX)	120			ns
Setup Time for a Repeated Start Condition	t <sub>SU</sub> , t <sub>STA</sub>	Standard mode	4.7			μs
		Fast mode	600			ns
		Fast mode plus	260			ns
		High-speed mode	160			ns
Data Setup Time	t <sub>SU</sub> , t <sub>DAT</sub>	Standard mode	250			ns
		Fast mode	100			ns
		Fast mode plus	50			ns
		High-speed mode	10			ns
Data Hold Time	t <sub>HD</sub> , t <sub>DAT</sub>	Standard mode	0		3.45	μs
		Fast mode	0		0.9	μs
		Fast mode plus	0			μs
		High-speed mode, CB - 100pF(MAX)	0		70	ns
		High-speed mode, CB - 400pF(MAX)	0		150	ns

I<sup>2</sup>C INTERFACE TIMING CHARACTERISTICS (continued)


PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Rise Time of SCL Signal	t <sub>RCL</sub>	Standard mode			1000	ns
		Fast mode	20 + 0.1 C <sub>B</sub>		300	ns
		Fast mode plus			120	ns
		High-speed mode, CB - 100pF(MAX)	10		40	ns
		High-speed mode, CB - 400pF(MAX)	20		80	ns
Rise Time of SCL Signal after a Repeated Start Condition and after an Acknowledge BIT	t <sub>RCL1</sub>	Standard mode	20 + 0.1 C <sub>B</sub>		1000	ns
		Fast mode	20 + 0.1 C <sub>B</sub>		300	ns
		Fast mode plus			120	ns
		High-speed mode, CB - 100pF(MAX)	10		80	ns
		High-speed mode, CB - 400pF(MAX)	20		160	ns
Fall Time of SCL Signal	t <sub>FCL</sub>	Standard mode	20 + 0.1 C <sub>B</sub>		300	ns
		Fast mode			300	ns
		Fast mode plus			120	ns
		High-speed mode, CB - 100pF(MAX)	10		40	ns
		High-speed mode, CB - 400pF(MAX)	20		80	ns
Rise Time of SDA Signal	t <sub>RDA</sub>	Standard mode			1000	ns
		Fast mode	20 + 0.1 C <sub>B</sub>		300	ns
		Fast mode plus			120	ns
		High-speed mode, CB - 100pF(MAX)	10		80	ns
		High-speed mode, CB - 400pF(MAX)	20		160	ns
Fall Time of SDA Signal	t <sub>FDA</sub>	Standard mode			300	ns
		Fast mode	20 + 0.1 C <sub>B</sub>		300	ns
		Fast mode plus			120	ns
		High-speed mode, CB - 100pF(MAX)	10		80	ns
		High-speed mode, CB - 400pF(MAX)	20		160	ns
Setup Time of STOP Condition	t <sub>SU</sub> , t <sub>STO</sub>	Standard mode	4			μs
		Fast mode	600			ns
		Fast mode plus	260			ns
		High-Speed mode	160			ns
Capacitive Load for SDA and SCL	C <sub>B</sub>	Standard mode			400	pF
		Fast mode			400	pF
		Fast mode plus			550	pF
		High-Speed mode			400	pF




TYPICAL PERFORMANCE CHARACTERISTICS

T<sub>A</sub> = +25°C, V<sub>IN</sub> = 5.0V, V<sub>OUT</sub> = 0.9V, unless otherwise noted.


Quiescent Current vs. Input Voltage

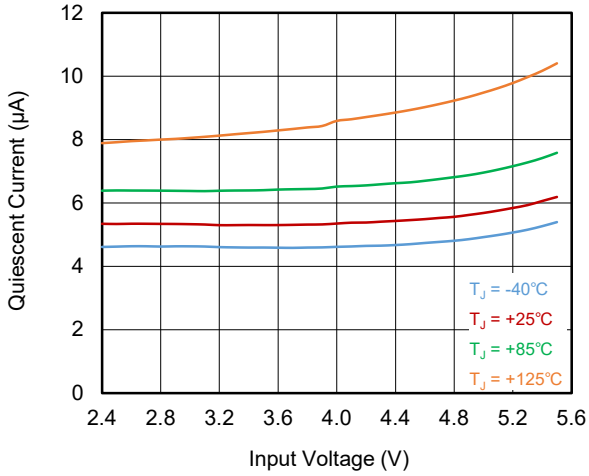


Shutdown Current vs. Input Voltage

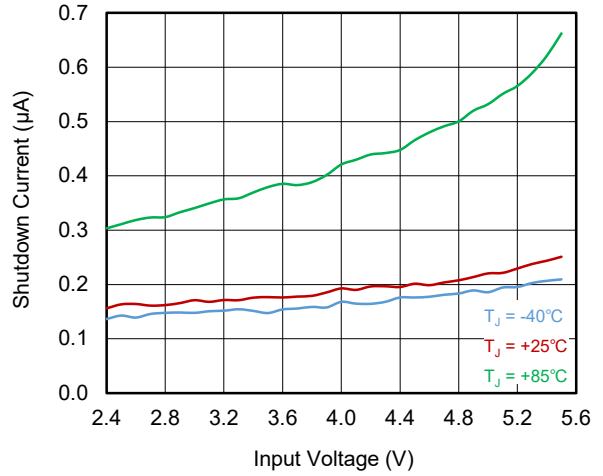


High-side FET On-Resistance vs. Input Voltage

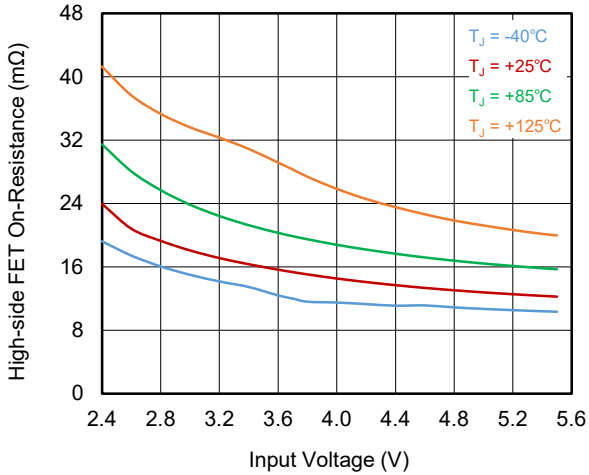


Low-side FET On-Resistance vs. Input Voltage

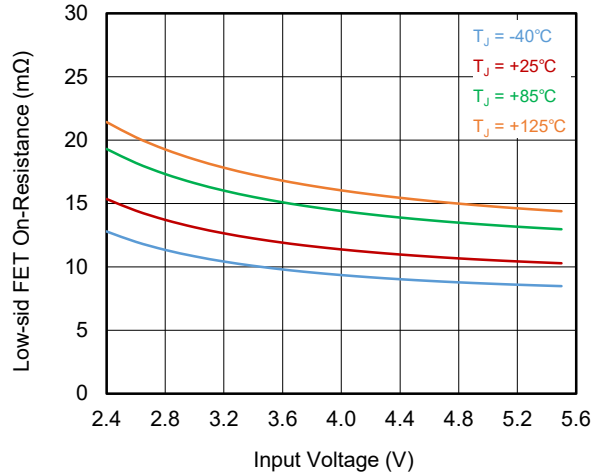

Efficiency vs. Output Current






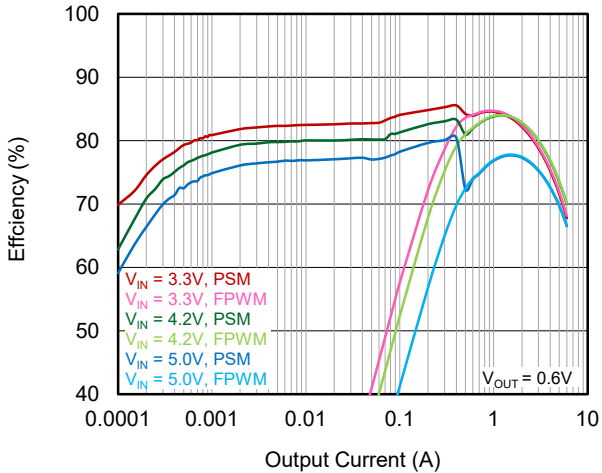


Output Voltage vs. Output Current

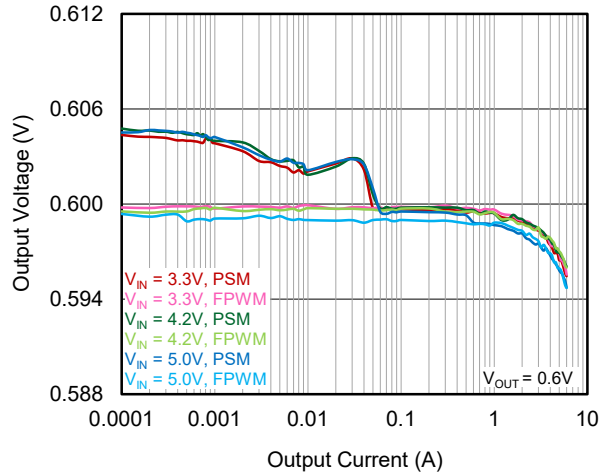







TYPICAL PERFORMANCE CHARACTERISTICS

T<sub>A</sub> = +25°C, V<sub>IN</sub> = 5.0V, V<sub>OUT</sub> = 0.9V, unless otherwise noted.

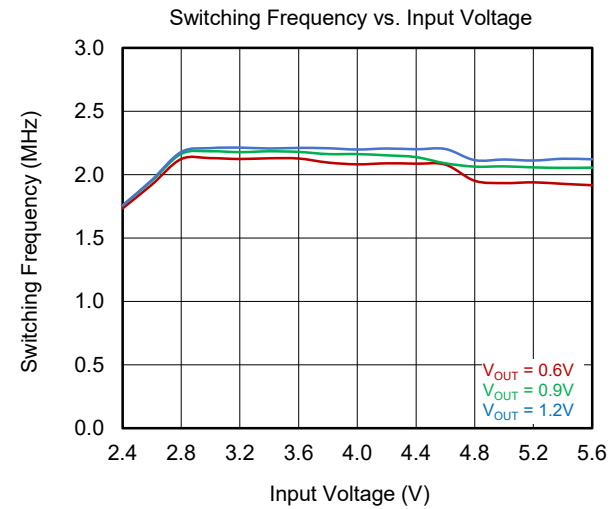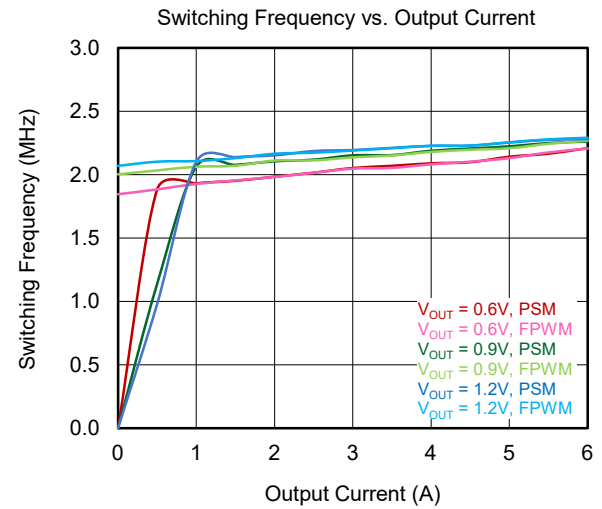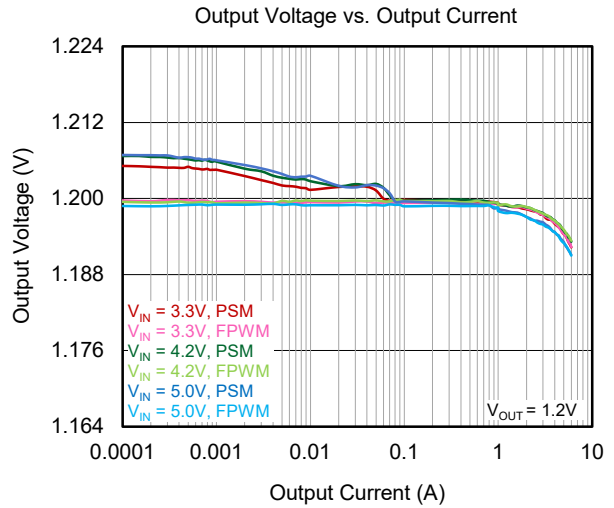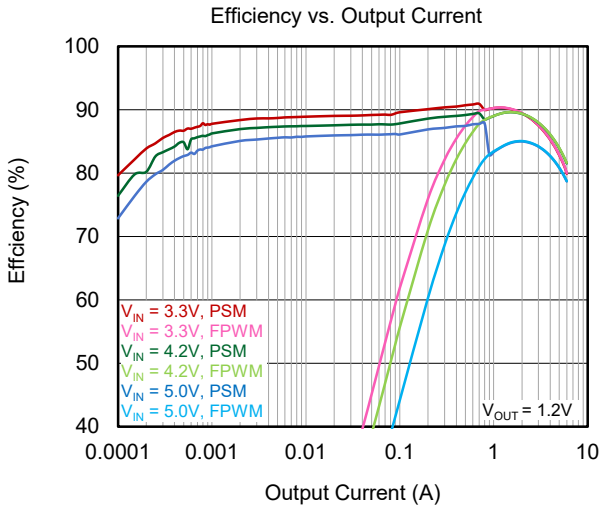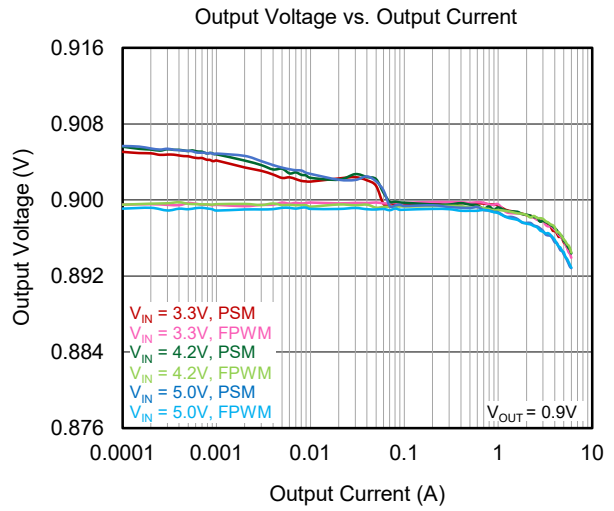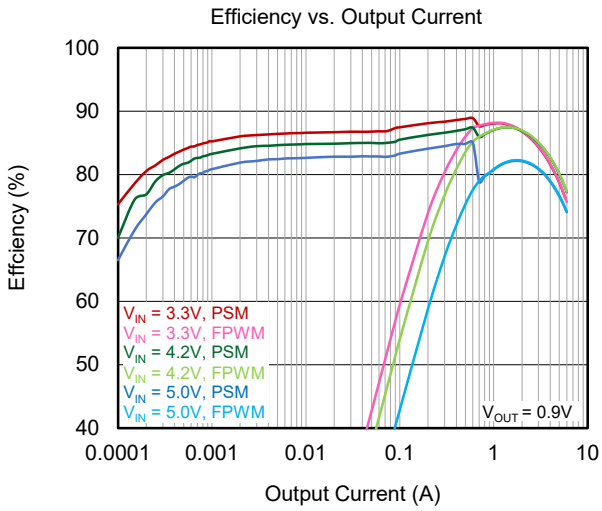






**TYPICAL PERFORMANCE CHARACTERISTICS**

T<sub>A</sub> = +25°C, V<sub>IN</sub> = 5.0V, V<sub>OUT</sub> = 0.9V, unless otherwise noted.

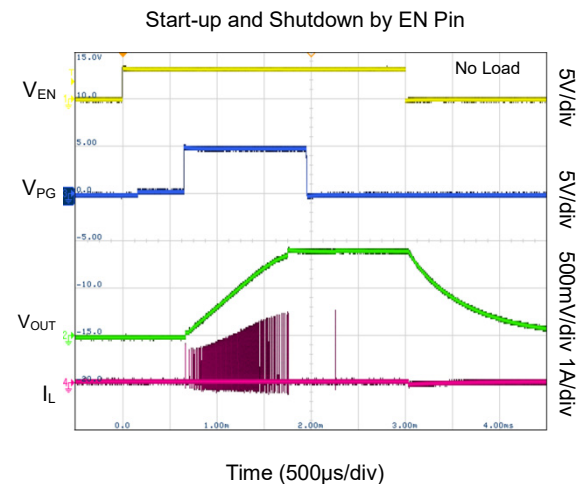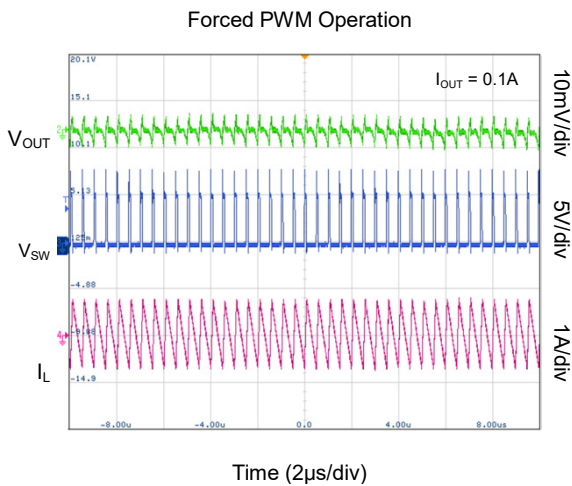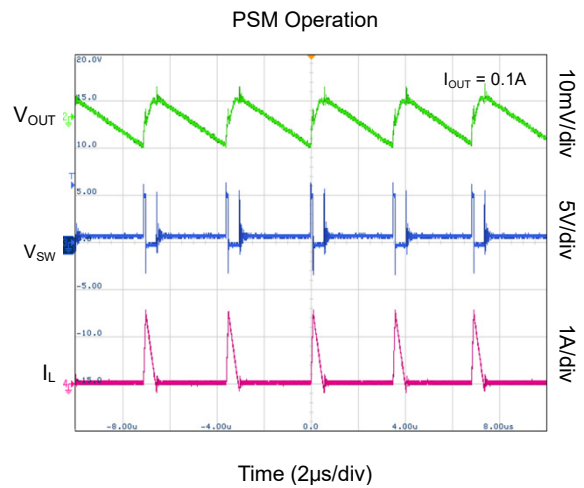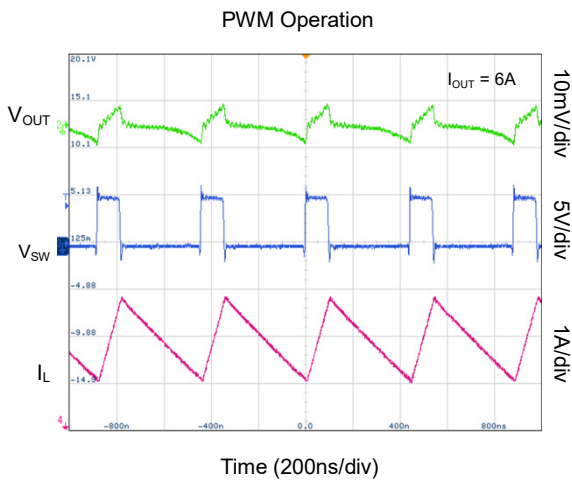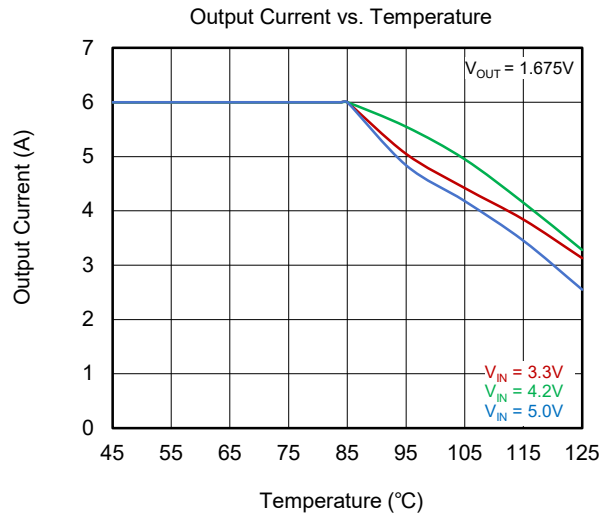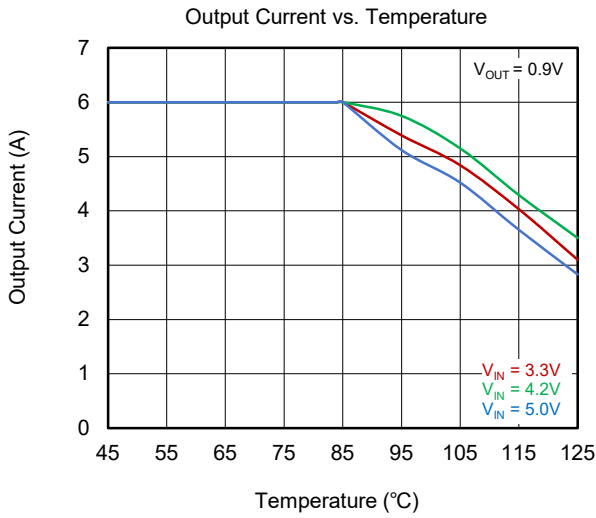

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

T<sub>A</sub> = +25°C, V<sub>IN</sub> = 5.0V, V<sub>OUT</sub> = 0.9V, unless otherwise noted.

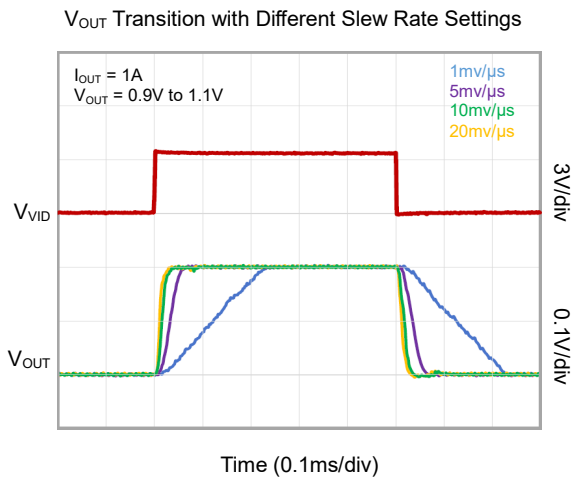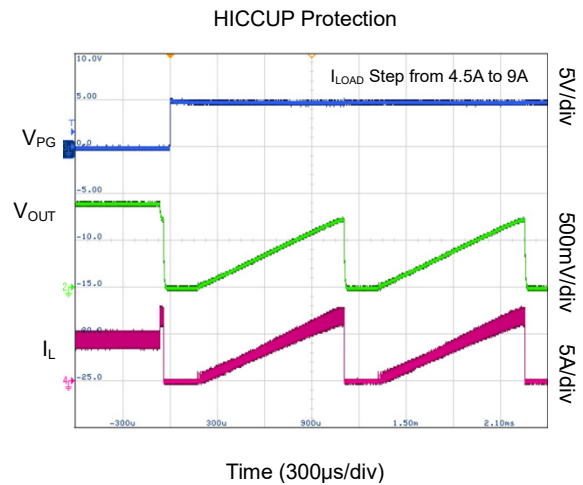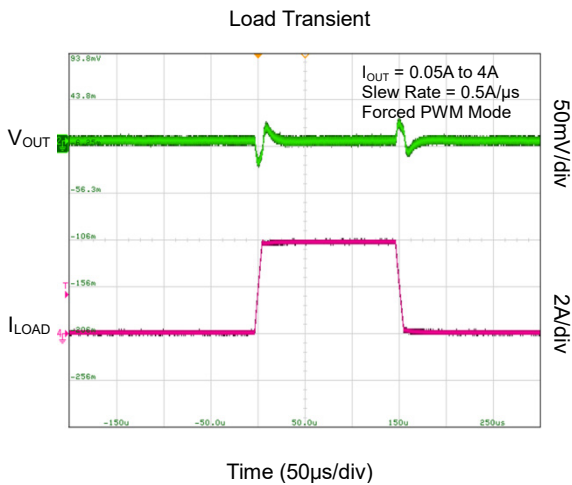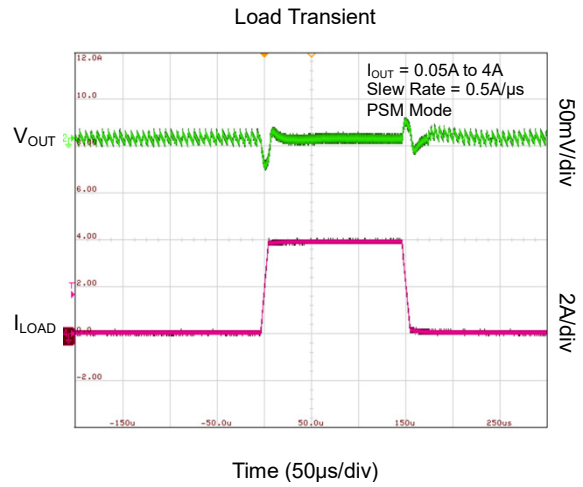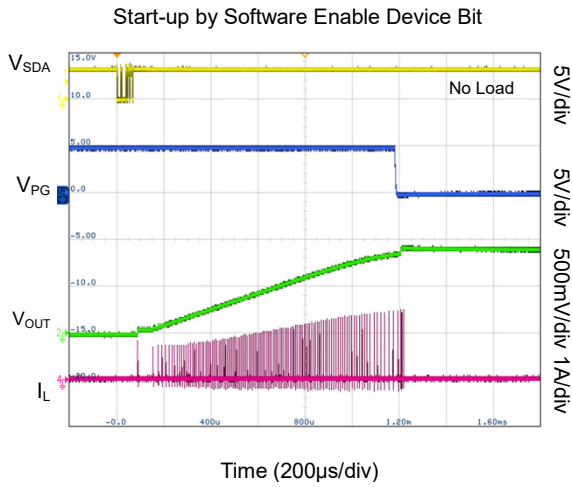

FUNCTIONAL BLOCK DIAGRAM

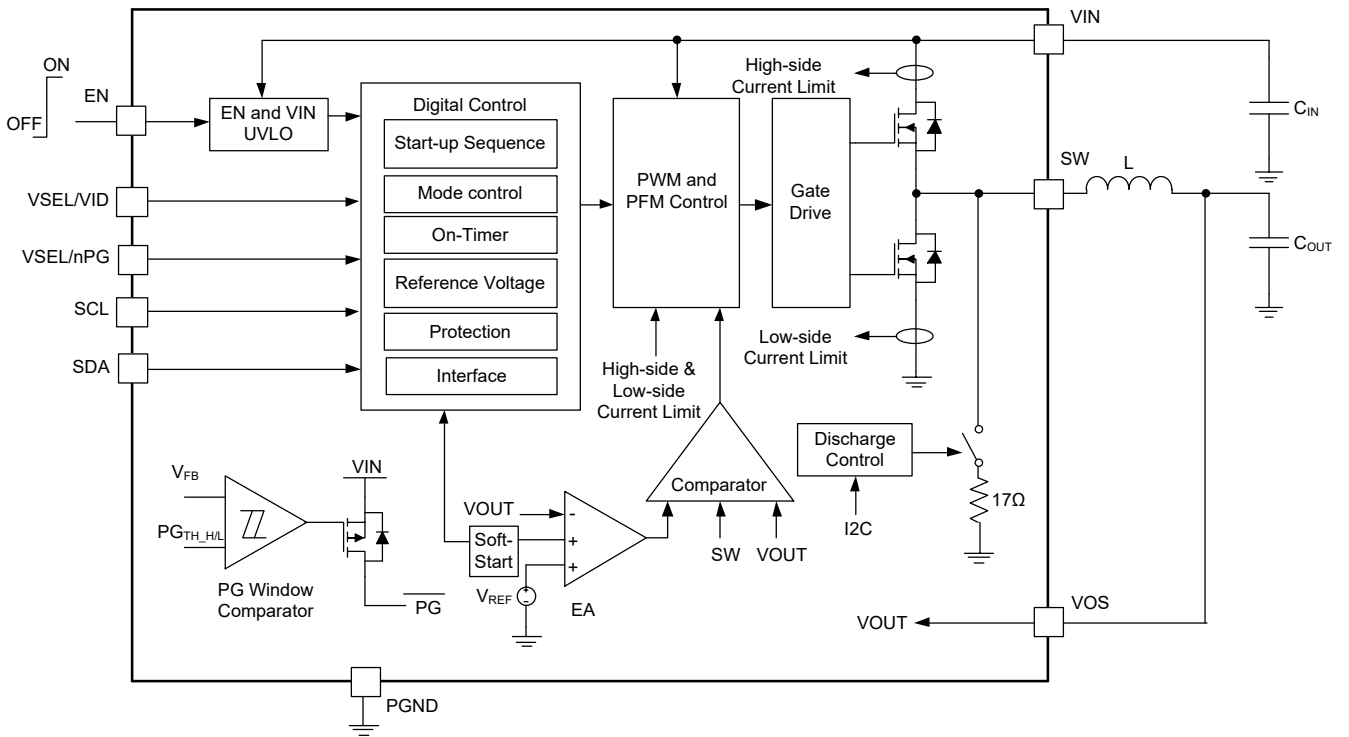


Figure 2. Block Diagram

### DETAILED DESCRIPTION

#### Overview

The SGM6037 family of synchronous Buck converter consumes 5µA (TYP) quiescent current and offers up to 6A of DC load current in a small WLCSP package. The device adopts the constant on-time (COT) architecture to provide superior load transient performance. In addition, the advanced control architecture offers excellent load and line regulation performance.

The device operates in PWM mode with 2.3MHz of fixed switching frequency at medium to heavy load. At light load, the device automatically operates in power-save mode to provide excellent light load efficiency. The device only requires two 22µF ceramic output capacitors to achieve minimal output voltage ripple at light load and heavy load.

#### Feature Description

##### Power-Save Mode

As the load current decreases, the inductor current reaches around 0A in a switching cycle, and the operation mode becomes discontinuous. The SGM6037 automatically enters power-save mode (PSM) in discontinuous mode. Equation 1 below calculates the device on-time in PSM.

$$t_{ON} = \frac{V_{OUT}}{V_{IN}} \times 416ns \quad (1)$$

In order to maintain regulation, the output voltage is slightly increased above the programmed voltage. Adding more output capacitors will minimize the output voltage rise in PSM.

##### Forced PWM Mode

The SGM6037 is able to operate in FPWM mode to achieve fixed switching frequency and output ripple across the entire operating load range. FPWM is configurable in CONTROL register (**REG0x03**) via I<sup>2</sup>C.

##### Start-up

When the input voltage is above the UVLO rising threshold of 2.2V (TYP), toggling the enable pin to logic high to start up the device. Before the output voltage starts ramping up, the device has an enable delay of 640µs (TYP). During the enable delay, the device establishes the internal reference, and reads the resistor connected to the VSET/VID or VSET/nPG pin to determine the start-up output voltage. The internal registers can be programmed via I<sup>2</sup>C after the enable delay.

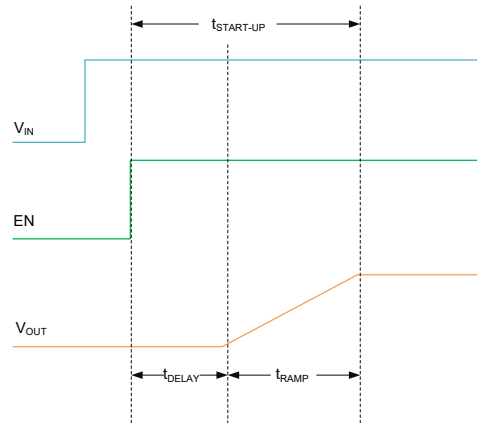


Figure 3. Start-up Sequence

The device initiates an internal soft-start when the enable delay finishes. The internal soft-start time is fixed to 1ms to ramp up the output voltage from 0V to the programmed output voltage. The soft-start mechanism effectively reduces the inrush current drawn from the input source, as well as providing a controlled output voltage rising ramp. For pre-biased output voltage start-up, the device starts up from the pre-biased voltage to the programmed output voltage.

##### Switch Current Limit and Hiccup Short-Circuit Protection

The device implements over-current protection when the load exceeds the maximum allowed 6A to prevent excessive current drawn from battery type inputs. During an output short scenario or a saturated inductor, the inductor current will reach the current limit threshold. When current limit threshold is reached, the device turns off the high-side switch to terminate the inductor current from further increase, and the low-side switch turns on to ramp down the inductor current to the low-side switch current limit.

During the short-circuit event, as the output voltage drops below 0.3V, the current limit threshold is foldback to 4A for 6A version to prevent the device from excessive temperature rise. When the high-side switch current limit and low-side current limit are triggered for 64 consecutive times, the switching is terminated immediately to enter hiccup short protection mode of 128µs hiccup off-time. The device resumes operation after hiccup off-time with the soft-start sequence. If the over-current or short condition remains, the device remains in the hiccup cycle until the fault condition is removed.

**DETAILED DESCRIPTION (continued)****Under-Voltage Lockout (UVLO)**

The SGM6037 offers input under-voltage lockout to prevent false triggering with unstable input source. The device's UVLO rising voltage is 2.2V (TYP) and falling threshold is 2.1V (TYP). The device stops operation as soon as the input voltage drops below the falling threshold. The output voltage discharge is active when UVLO falling threshold is reached, and the output voltage discharge function is programmable via the CONTROL register. The internal register settings are not cleared when UVLO is triggered.

When the input voltage drops below the falling threshold, the UVLO bit in the STATUS register is set, and all register settings will reset until the input voltage drops below 1.8V (TYP).

**Thermal Warning and Shutdown**

The SGM6037 is a high power density device, thus when the junction temperature rises above the  $T_{JW}$ , a thermal pre-warning indicator in the STATUS register will toggle high to alert the host, however the device will continue operating.

As the junction temperature continues to rise and exceeds above the  $T_{SD}$ , the device stops switching, enabling active discharge to discharge the output voltage and enters thermal shutdown. The device has a 20°C (TYP) thermal shutdown hysteresis to allow the device to resume operation automatically with internal soft-start. The register settings are not changed during thermal shutdown.

**Device Functional Modes****Enable and Disable (EN)**

I<sup>2</sup>C interface is live when the EN pin is toggled logic high after the enable delay time. When the EN pin is toggled to logic low, power FETs are off as well as the internal control circuits. Register settings are reset except the EN\_OUTPUT\_DISCHG bit. EN pin cannot be left floating.

Device enters shutdown mode when EN pin is logic low. I<sup>2</sup>C communication is terminated in this mode.

The EN pin supports 1.2V I/O logic with 0.66V rising threshold and 0.58V falling threshold.

The device also supports a software enable and disable via EN\_DEVICE bit in CONTROL register while EN pin is toggled to logic high. When the device is enabled by this bit, the device starts up with  $t_{RAMP}$ , and no  $t_{DELAY}$  is required. When the device is disabled by this bit, the device stops switching, but I<sup>2</sup>C communication remains active.

**Output Discharge**

The device implements I<sup>2</sup>C programmable output voltage discharge function for application requiring sequencing control. The internal discharge path discharges the output voltage through the SW pin to ground. There are four scenarios to discharge the output voltage: EN pin is toggled to logic low, EN\_DEVICE bit is set to 0, input voltage UVLO or device thermal shutdown.

Output voltage discharge function is disabled when the EN\_OUTPUT\_DISCHG bit is set to 0. The output discharge function remains active as long as the input voltage is higher than 1V (TYP) and the EN\_OUTPUT\_DISCHG bit is retained. When a rising edge of the EN pin is applied, the EN\_OUTPUT\_DISCHG bit is reset.

**Start-up Output Voltage and I<sup>2</sup>C Slave Address Selection (VSET)**

In start-up phase, during the enable delay period, the resistor is connected to VSET/MID or VSET/nPG pin to program the output voltage as well as device slave address through an internal R2D (resistor to digital) converter. Table 1 lists the programmable options.

**DETAILED DESCRIPTION (continued)****Table 1. Start-up Output Voltage and I<sup>2</sup>C Slave Address Options**

START-UP OUTPUT VOLTAGE (TYP)	RESISTOR (E96 SERIES, ±1% ACCURACY) AT VSET/VID OR VSET/nPG PIN	I <sup>2</sup> C SLAVE ADDRESS
1.15V	249kΩ	1000 110
1.10V	205kΩ	1000 101
1.05V	162kΩ	1000 100
1.00V	133kΩ	1000 011
0.95V	105kΩ	1000 010
0.90V	86.6kΩ	1000 001
0.85V	68.1kΩ	1001 000
0.80V	56.2kΩ	1001 001
0.75V	44.2kΩ	1001 010
0.70V	36.5kΩ	1001 011
0.65V	28.7kΩ	1001 100
0.60V	23.7kΩ	1001 101
0.55V	18.7kΩ	1001 110
0.50V	15.4kΩ	1001 111
0.45V	12.1kΩ	1000 000
0.40V	10kΩ	1000 111

During the enable delay time, a current source is applied on the VSET resistor. The internal ADC converts the voltage on the VSET pin to a digital signal to program the output voltage and I<sup>2</sup>C slave address. Once this R2D conversion completes, the current source is turned off to avoid unnecessary current consumption. Any capacitance higher than 30pF is not recommended to connect between the VSET pin to ground.

If I<sup>2</sup>C command is issued to change the output voltage, the device will ramp up to the VSET resistor programmed output voltage first before ramping up/down to the I<sup>2</sup>C programmed output voltage.

**VID**

The device offers 2 selectable output voltage registers via the VID pin, and dynamic voltage scaling (DVS) is supported via these 2 registers. VID pin is pulled to logic low, the output voltage follows **REG0x01**, and VID pin is pulled to logic high, the output voltage follows **REG0x02**.

Output voltage adjustment can be made via either I<sup>2</sup>C programming or toggling the VID pin, and the output

voltage ramp up and down speed is also configurable via the RAMP\_SPEED bits.

**Active-Low Power Good**

The SGM6037 offers variants for an active-low power good option if VID function is not used. The device starts to compare the actual output voltage with the VSET resistor programmed output voltage after the enable delay time. When the voltage reaches 91% (TYP) of programmed output voltage, after 200μs delay, the VSET/nPG is pulled low. The VSET/nPG pin remains low as long as the output voltage is within 91% to 111% of the programmed output voltage.

For the VSET/nPG version, a resistor must be connected from this pin to ground to properly configure the start-up voltage and I<sup>2</sup>C slave address. VOUT Register 2 is disabled and this pin's source current is up to 1mA. Due to the active-low logic configuration, in device shutdown, leakage current is increased through the resistor connected to this pin, since the VSET/nPG pin is pulled high.



**DETAILED DESCRIPTION (continued)**

Table 2. VSET/nPG Pin Logic

DEVICE CONDITIONS		nPG LOGIC STATUS
Enable	$0.91 \times V_{OUT\_NOM} \leq V_{VOS} \leq 1.11 \times V_{OUT\_NOM}$	Low
	$V_{VOS} < 0.91 \times V_{OUT\_NOM}$ or $V_{VOS} > 1.11 \times V_{OUT\_NOM}$	High
Thermal Shutdown	$T_J > T_{SD}$	High
Power Supply Removal	$V_{IN} < 1.8V$	Undefined

**REGISTER MAPS**

All registers are 8-bit and individual bits are named from D[0] (LSB) to D[7] (MSB).

**I<sup>2</sup>C Address Map of SGM6037**

ADDRESS	REGISTER NAME	D[7]	D[6]	D[5]	D[4]	D[3]	D[2]	D[1]	D[0]
0x01	VOUT Register 1	VO1_SET[7:0]							
0x02	VOUT Register 2	VO2_SET[7:0]							
0x03	CONTROL Register	RESET	EN_FPWM_CHANGE	EN_DEVICE	EN_FPWM	EN_OUTPU T_DISCHG	EN_HICCUP	RAMP_SPEED	
0x05	STATUS Register	Reserved			T_WARN	HICCUP	Reserved	Reserved	UVLO

Bit Types:

R: Read only

R/W: Read/Write

## REGISTER MAPS (continued)

## REG0x01: VOUT Register 1 [Reset = 0x64]

BITS	BIT NAME	DEFAULT	TYPE	DESCRIPTION
D[7:0]	VO1_SET[7:0]	0110 0100	R/W	Output Voltage 0x00 = 400mV 0x01 = 405mV ... 0x64 = 900mV (default) ... 0xFE = 1670mV 0xFF = 1675mV

## REG0x02: VOUT Register 2 [Reset = 0x64]

BITS	BIT NAME	DEFAULT	TYPE	DESCRIPTION
D[7:0]	VO2_SET[7:0]	0110 0100	R/W	Output Voltage 0x00 = 400mV 0x01 = 405mV ... 0x64 = 900mV (default) ... 0xFE = 1670mV 0xFF = 1675mV

## REG0x03: CONTROL Register [Reset = 0x6F]

BITS	BIT NAME	DEFAULT	TYPE	DESCRIPTION
D[7]	RESET	0	R/W	1 = Reset all registers to default
D[6]	EN_FPWM_CHANGE	1	R/W	Enable FPWM mode during output voltage change 0 = Keep the current mode status during output voltage change 1 = Force the device in FPWM during output voltage change (default)
D[5]	EN_DEVICE	1	R/W	Software Enable Device 0 = Disable the device. All registers values are still kept 1 = Re-enable the device with a new start-up without the $t_{DELAY}$ period (default)
D[4]	EN_FPWM	0	R/W	Enable FPWM Mode 0 = Set the device in power save mode at light loads (default) 1 = Set the device in forced PWM mode at light loads
D[3]	EN_OUTPUT_DISCHG	1	R/W	Enable Output Discharge 0 = Disable output discharge 1 = Enable output discharge (default)
D[2]	EN_HICCUP	1	R/W	Enable HICCUP 0 = Disable HICCUP. Enable latching protection 1 = Enable HICCUP. Disable latching protection (default)
D[1:0]	RAMP_SPEED	11	R/W	Voltage Ramp Speed 00 = 20mV/ $\mu$ s (0.25 $\mu$ s/step) 01 = 10mV/ $\mu$ s (0.5 $\mu$ s/step) 10 = 5mV/ $\mu$ s (1 $\mu$ s/step) 11 = 1mV/ $\mu$ s (5 $\mu$ s/step, default)

## REG0x05: STATUS Register [Reset = 0x00]

BITS	BIT NAME	DEFAULT	TYPE	DESCRIPTION
D[7:5]	Reserved			Reserved.
D[4]	T_WARN	0	R	Thermal warning. 1: Junction temperature is higher than +130°C.
D[3]	HICCUP	0	R	1: Device has HICCUP status once.
D[2]	Reserved			Reserved.
D[1]	Reserved			Reserved.
D[0]	UVLO	0	R	1: The input voltage is less than the UVLO falling threshold.

APPLICATION INFORMATION

Typical Application

Figure 4 below shows a typical schematic for a 0.9V output application with a wide input voltage range.

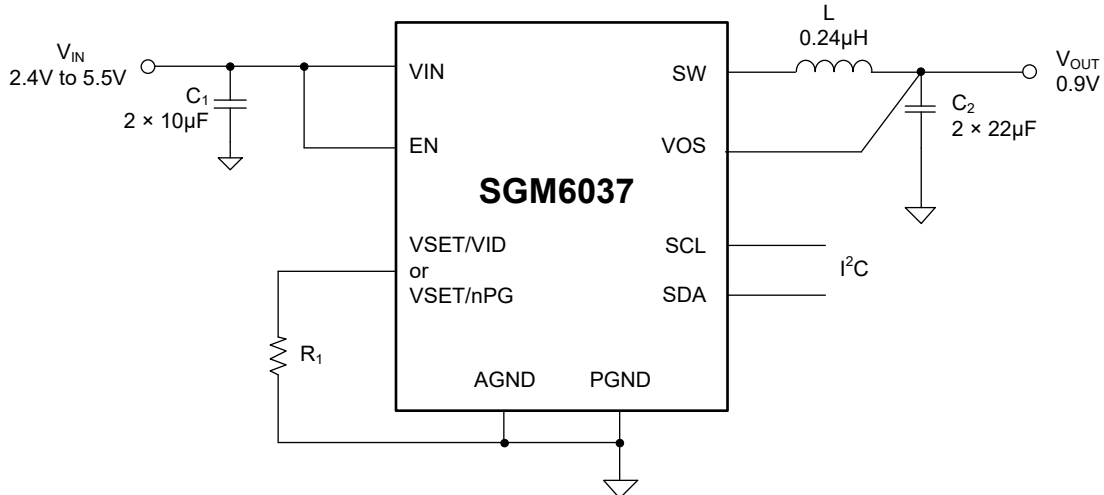


Figure 4. 6A Output Current Typical Application

Design Requirements

Table 3 below shows the operation conditions of this design example.

Table 3. Design Parameters

DESIGN PARAMETER	EXAMPLE VALUE
Input Voltage	2.4V to 5.5V
Output Voltage	0.9V
Maximum Output Current	6A

Table 4 lists the components used for the example.

Table 4. List of Components

REFERENCE	DESCRIPTION	MANUFACTURER
C <sub>1</sub>	10µF, ceramic capacitor, 6.3V, X7R, size 0603, CL10B106MQ8NRNC	Samsung
C <sub>2</sub>	22µF, ceramic capacitor, 6.3V, X7R, size 0805, GRM21BZ70J226ME44L	Murata
L <sub>1</sub>	0.24µH, power inductor, size 0806, DFE201612E-R24M=P2	Murata
R <sub>1</sub>	Depending on the start-up output voltage, size 0603	Std

REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Original (DECEMBER 2024) to REV.A


Page

Changed from product preview to production data..... All


# PACKAGE INFORMATION

## PACKAGE OUTLINE DIMENSIONS


### WLCSP-1.05×1.78-15B

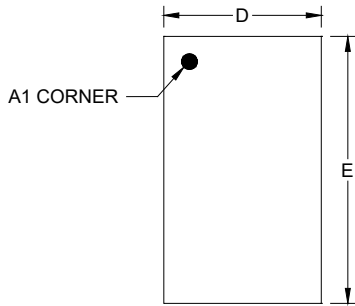


TOP VIEW

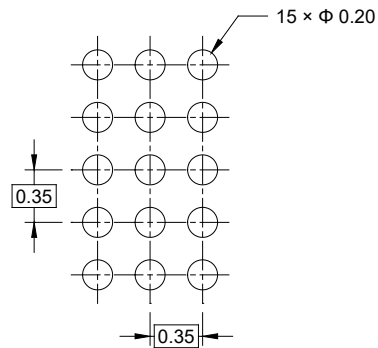

RECOMMENDED LAND PATTERN (Unit: mm)

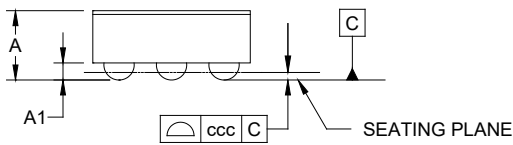

SIDE VIEW



BOTTOM VIEW


Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	-	-	0.500
A1	0.094	-	0.134
D	1.020	-	1.080
E	1.750	-	1.810
d	0.172	-	0.232
e	0.350 BSC		
ccc	0.050		

NOTE: This drawing is subject to change without notice.


# PACKAGE INFORMATION

## TAPE AND REEL INFORMATION

### REEL DIMENSIONS

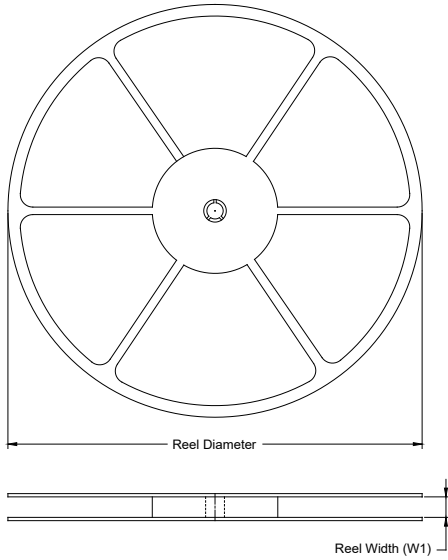

### TAPE DIMENSIONS

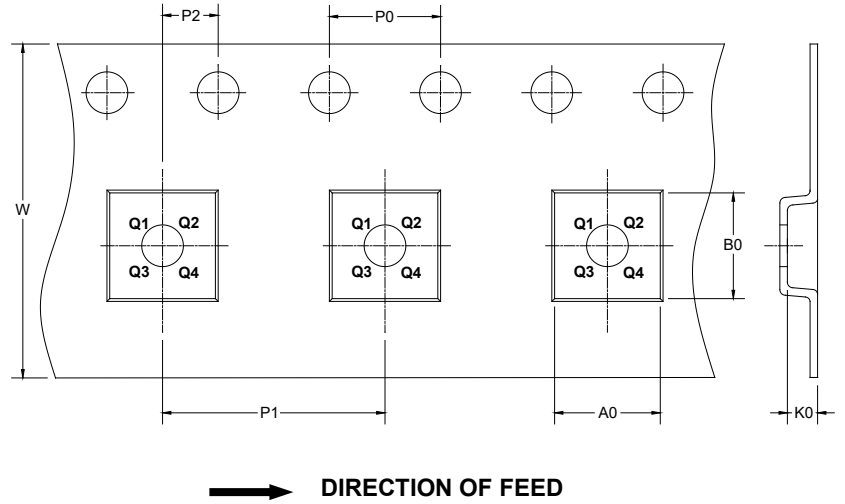

NOTE: The picture is only for reference. Please make the object as the standard.


### KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
WLCSP-1.05×1.78-15B	7"	9.0	1.16	1.88	0.65	4.0	4.0	2.0	8.0	Q1

DD0001

# PACKAGE INFORMATION

## CARTON BOX DIMENSIONS

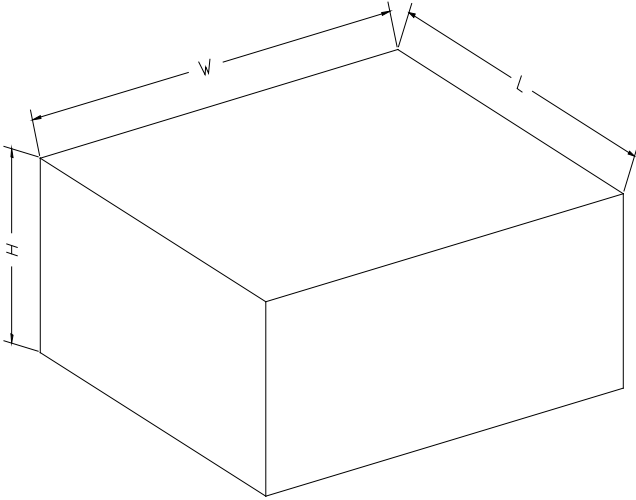

NOTE: The picture is only for reference. Please make the object as the standard.

## KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

D00002