

### GENERAL DESCRIPTION

The SGM48754X is a quad, SPST (single-pole/single-throw), CMOS analog switch. It operates from 2.5V to 5.5V single power supply and all digital inputs support 1.8V logic control.

Other features include low voltage, low on-resistance and low off-leakage current. The high performances make it very suitable for multiple applications, such as cellular phones, audio and video signal routing, etc.

The SGM48754X is available in Green SOIC-14 and TSSOP-14 packages. It operates over an ambient temperature range of -40°C to +125°C.

### FEATURES

- **Single Supply Voltage Range: 2.5V to 5.5V**
- **On-Resistance: 27Ω (TYP) with 5V Supply**
- **“T” Type Switch**
- **1.8V Logic Compatible**
- **Low On-Resistance Flatness**
- **High Off-Isolation: -72dB ( $R_L = 50\Omega$ ,  $f = 1\text{MHz}$ )**
- **Low Off-Leakage Current:  $\pm 1\mu\text{A}$  (MAX)**
- **Low On-Leakage Current:  $\pm 1\mu\text{A}$  (MAX)**
- **Low Distortion: 0.33% ( $R_L = 600\Omega$ ,  $f = 20\text{Hz to } 20\text{kHz}$ )**
- **-40°C to +125°C Operating Temperature Range**
- **Available in Green SOIC-14 and TSSOP-14 Packages**

### APPLICATIONS

Automotive  
Portable Equipment  
Sample-and-Hold Circuits  
Data-Acquisition Systems  
Battery-Powered Systems  
Audio and Video Signal Routing

**PACKAGE/ORDERING INFORMATION**


MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM48754X	SOIC-14	-40°C to +125°C	SGM48754XS14G/TR	SGM48754XS14 XXXXX	Tape and Reel, 2500
	TSSOP-14	-40°C to +125°C	SGM48754XTS14G/TR	SGM48754 XTS14 XXXXX	Tape and Reel, 4000

**MARKING INFORMATION**

NOTE: XXXXX = Date Code, Trace Code and Vendor Code.

**SOIC-14/TSSOP-14**

**XXXXX**



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

**ABSOLUTE MAXIMUM RATINGS**

V <sub>CC</sub> to GND .....	-0.3V to 6V
Voltage into Any Terminal <sup>(1)</sup> .....	-0.3V to (V <sub>CC</sub> + 0.3V)
Continuous Current into Any Terminal .....	±20mA
Peak Current (Pulsed at 1ms, 10% duty cycle).....	±40mA
Junction Temperature .....	+150°C
Storage Temperature Range .....	-65°C to +150°C
Lead Temperature (Soldering, 10s).....	+260°C
ESD Susceptibility	
HBM.....	4000V
CDM .....	1000V

NOTE:

1. Internal diodes will clamp the voltage on any signal that is lower than GND. Limit the current through the forward diode to the maximum ratings.

**RECOMMENDED OPERATING CONDITIONS**

Supply Voltage Range .....	2.5V to 5.5V
Operating Temperature Range .....	-40°C to +125°C

**OVERSTRESS CAUTION**

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.


**ESD SENSITIVITY CAUTION**

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

**DISCLAIMER**

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

**PIN CONFIGURATIONS**

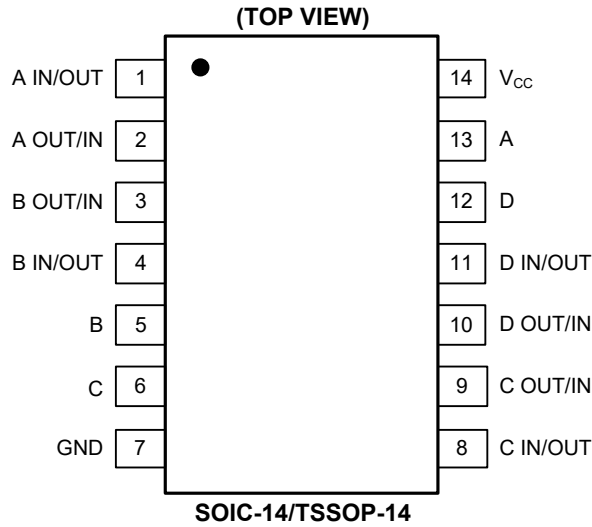

**PIN DESCRIPTION**

PIN	NAME	FUNCTION
1	A IN/OUT	Switch A Input/Output Pin.
2	A OUT/IN	Switch A Output/Input Pin.
3	B OUT/IN	Switch B Output/Input Pin.
4	B IN/OUT	Switch B Input/Output Pin.
5	B	Switch B Control Pin.
6	C	Switch C Control Pin.
7	GND	Ground.
8	C IN/OUT	Switch C Input/Output Pin.
9	C OUT/IN	Switch C Output/Input Pin.
10	D OUT/IN	Switch D Output/Input Pin.
11	D IN/OUT	Switch D Input/Output Pin.
12	D	Switch D Control Pin.
13	A	Switch A Control Pin.
14	V <sub>CC</sub>	Positive Analog and Digital Supply Voltage Input Pin.

**NOTE:**


Any input pin can be used as an output pin, and any output pin can also be used as an input pin. Signal transmission in both directions is equally well.

**FUNCTION TABLE**


SELECT INPUTS	SWITCH STATUS
A/B/C/D	
H	All Switches Close
L	All Switches Open

PACKAGE OUTLINE DIMENSIONS

SOIC-14

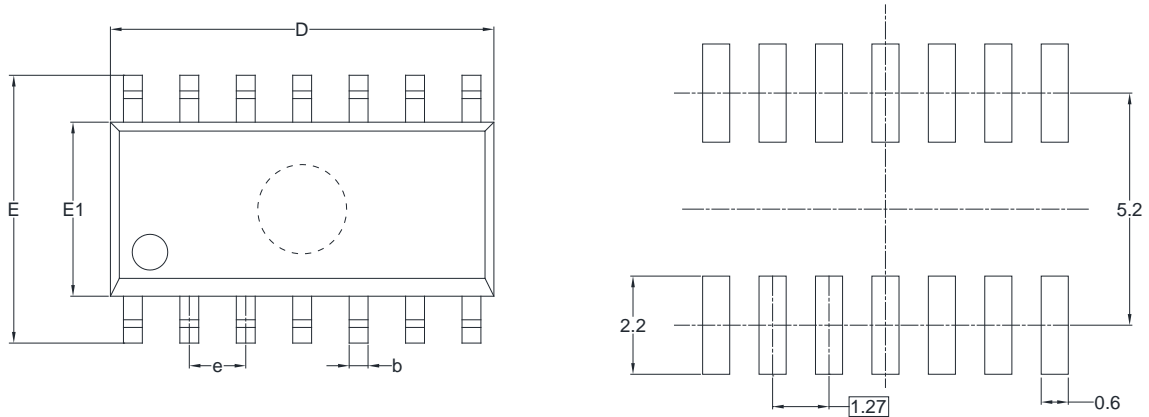

RECOMMENDED LAND PATTERN (Unit: mm)

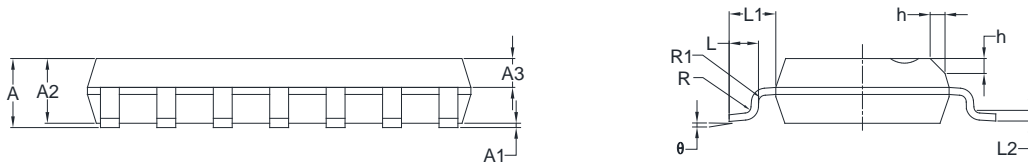



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.35	1.75	0.053	0.069
A1	0.10	0.25	0.004	0.010
A2	1.25	1.65	0.049	0.065
A3	0.55	0.75	0.022	0.030
b	0.36	0.49	0.014	0.019
D	8.53	8.73	0.336	0.344
E	5.80	6.20	0.228	0.244
E1	3.80	4.00	0.150	0.157
e	1.27 BSC		0.050 BSC	
L	0.45	0.80	0.018	0.032
L1	1.04 REF		0.040 REF	
L2	0.25 BSC		0.01 BSC	
R	0.07		0.003	
R1	0.07		0.003	
h	0.30	0.50	0.012	0.020
θ	0°	8°	0°	8°

NOTES:

1. Body dimensions do not include mode flash or protrusion.
2. This drawing is subject to change without notice.

## PACKAGE OUTLINE DIMENSIONS

### TSSOP-14

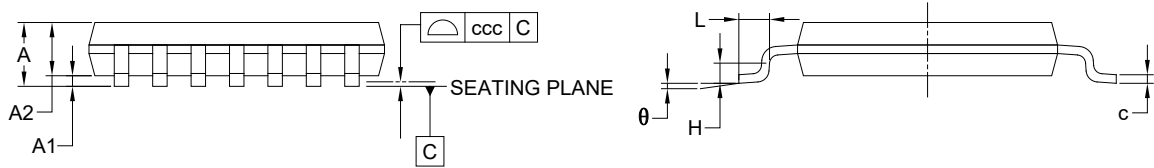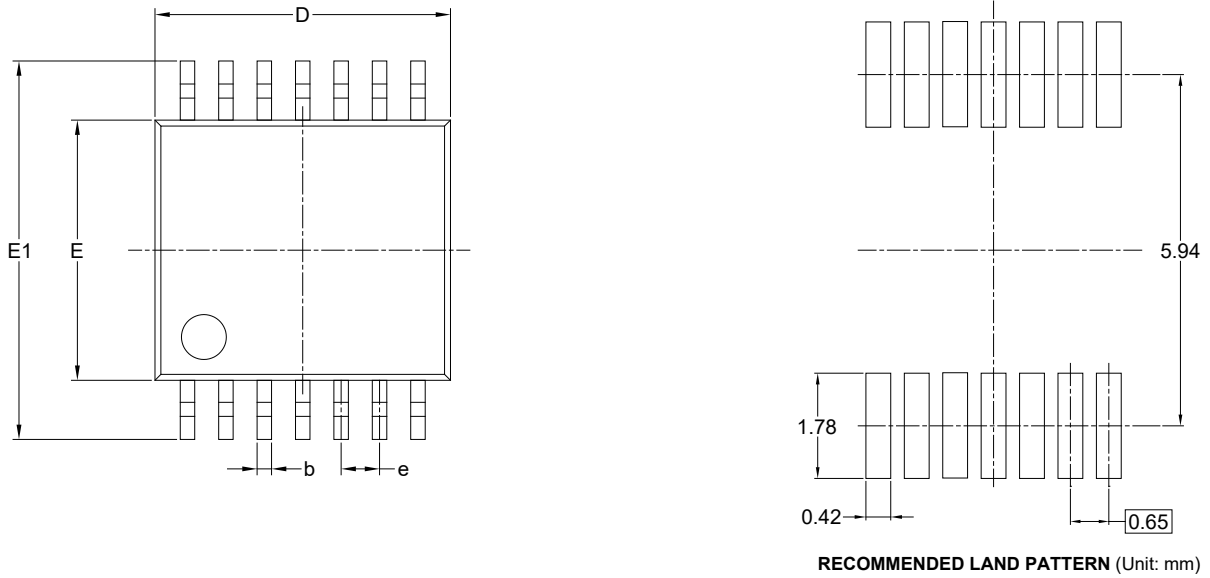

Symbol	Dimensions In Millimeters		
	MIN	MOD	MAX
A	-	-	1.200
A1	0.050	-	0.150
A2	0.800	-	1.050
b	0.190	-	0.300
c	0.090	-	0.200
D	4.860	-	5.100
E	4.300	-	4.500
E1	6.200	-	6.600
e	0.650 BSC		
L	0.450	-	0.750
H	0.250 TYP		
$\theta$	0°	-	8°
ccc	0.100		

**NOTES:**

1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.
3. Reference JEDEC MO-153.

## TAPE AND REEL INFORMATION

### REEL DIMENSIONS



### TAPE DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

### KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOIC-14	13"	16.4	6.60	9.30	2.10	4.0	8.0	2.0	16.0	Q1
TSSOP-14	13"	12.4	6.80	5.40	1.50	4.0	8.0	2.0	12.0	Q1

DD0001

# PACKAGE INFORMATION

## CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

## KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13"	386	280	370	5

DD0002