

GENERAL DESCRIPTION

The SGM11108M is a single-pole/eight-throw (SP8T) antenna switch, which supports from 0.1GHz to 3GHz. The device features low insertion loss and high isolation, which make it suitable for high linearity receiving applications. It also has the advantage of high linearity performance. The SGM11108M is not subject to cellular interference and is applied to multi-mode and multi-band LTE mobile phones.

The SGM11108M has the ability to integrate SP8T RF switch and MIPI controller on silicon-on-insulator (SOI) process. Internal driver and decoder for switch control signals are offered by the controller, which makes it flexible in RF path band and routing selection.

No external DC blocking capacitors required on the RF paths as long as no external DC voltage is applied, which can save PCB area and cost.

The SGM11108M is available in a Green UTQFN-2x2-14AL package.

APPLICATIONS

3G/4G Applications

FEATURES

- **Supply Voltage Range: 2.4V to 4.8V**
- **Advanced Silicon-On-Insulator (SOI) Process**
- **Frequency Range: 0.1GHz to 3GHz**
- **Low Insertion Loss: 0.65dB (TYP) at 2.7GHz**
- **MIPI RFFE Interface Compatible**
- **No External DC Blocking Capacitors Required**
- **Available in a Green UTQFN-2x2-14AL Package**

BLOCK DIAGRAM

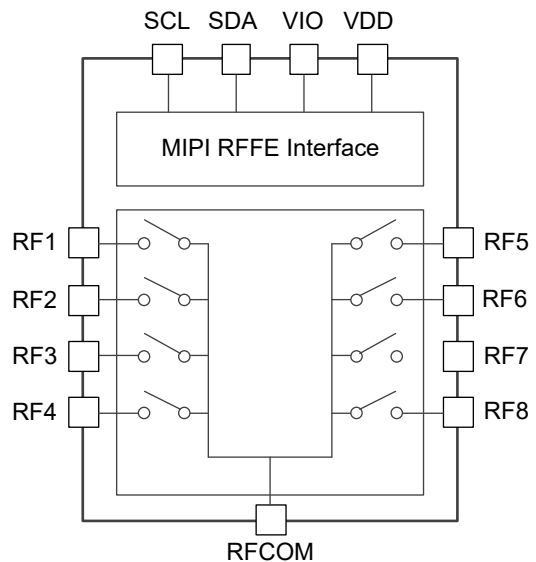



Figure 1. SGM11108M Block Diagram

PACKAGE/ORDERING INFORMATION

| MODEL | PACKAGE DESCRIPTION | SPECIFIED TEMPERATURE RANGE | ORDERING NUMBER | PACKAGE MARKING | PACKING OPTION |
|-----------|---------------------|-----------------------------|---------------------|-----------------|---------------------|
| SGM11108M | UTQFN-2x2-14AL | -40°C to +85°C | SGM11108MYURP14G/TR | 007 XXXX | Tape and Reel, 3000 |

MARKING INFORMATION

NOTE: XXXX = Date Code and Trace Code.



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

- Supply Voltage, V_{DD} 5V
- Supply Voltage for MIPI, V_{IO} 2V
- SDA, SCL Control Voltage, V_{CTL} 2V
- RF Input Power, P_{IN} 27dBm
- Junction Temperature +150°C
- Storage Temperature Range -55°C to +150°C
- Lead Temperature (Soldering, 10s) +260°C
- ESD Susceptibility
- HBM 1000V

RECOMMENDED OPERATING CONDITIONS

- Operating Temperature Range -40°C to +85°C
- Operating Frequency Range 0.1GHz to 3GHz
- Supply Voltage, V_{DD} 2.4V to 4.8V
- Supply Voltage for MIPI, V_{IO} 1.65V to 1.95V

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.


ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATION

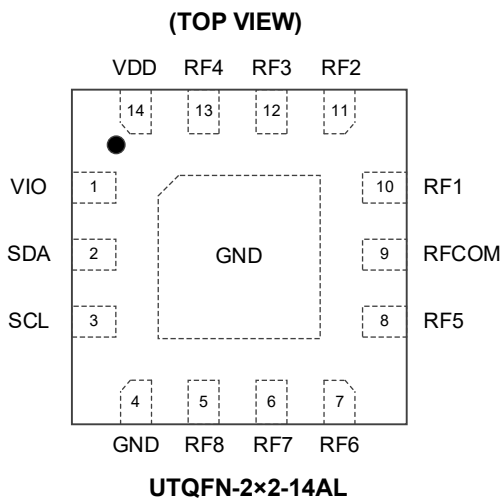

PIN DESCRIPTION

| PIN | NAME | FUNCTION |
|-------------|-------|--------------------------|
| 1 | VIO | Supply Voltage for MIPI. |
| 2 | SDA | RFFE Data Signal. |
| 3 | SCL | RFFE Clock Signal. |
| 4 | GND | Ground. |
| 5 | RF8 | RF Port 8. |
| 6 | RF7 | RF Port 7. |
| 7 | RF6 | RF Port 6. |
| 8 | RF5 | RF Port 5. |
| 9 | RFCOM | RF Common Port. |
| 10 | RF1 | RF Port 1. |
| 11 | RF2 | RF Port 2. |
| 12 | RF3 | RF Port 3. |
| 13 | RF4 | RF Port 4. |
| 14 | VDD | DC Power Supply. |
| Exposed Pad | GND | Ground. |

Register_0 TRUTH TABLE

Table 1. Register_0 Truth Table

| State | Mode | Register_0 Bits | | | | | | | |
|-------|-----------|-----------------|----|----|----|----|----|----|----|
| | | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| 1 | Isolation | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 2 | RF1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| 3 | RF2 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 0 |
| 4 | RF3 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 0 |
| 5 | RF4 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 1 |
| 6 | RF5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 7 | RF6 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 1 |
| 8 | RF7 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 0 |
| 9 | RF8 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 |

ELECTRICAL CHARACTERISTICS

(T_A = +25°C, V_{DD} = 2.4V to 4.8V, typical values are at V_{DD} = 2.8V, P_{IN} = 0dBm, 50Ω, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|--------------------|---|-----------------------|-----------------|------|-------|
| DC Characteristics | | | | | | |
| Supply Voltage | V _{DD} | | 2.4 | 2.8 | 4.8 | V |
| Supply Current | I _{DD} | | | 32 | 60 | μA |
| Supply Voltage for MIPI | V _{IO} | | 1.65 | 1.8 | 1.95 | V |
| Supply Current for MIPI | I _{IO} | | | 4.8 | 10 | μA |
| Control Voltage | V _{CTL_H} | High | 0.8 × V _{IO} | V _{IO} | 1.95 | V |
| | V _{CTL_L} | Low | 0 | | 0.45 | |
| Switching Time | t _{SW} | 50% of control voltage to 90% of RF power | | 1 | 2 | μs |
| Turn-On Time | t _{ON} | Time from V _{DD} = 0V to part on and RF at 90% | | 5 | 10 | μs |
| RF Characteristics | | | | | | |
| Insertion Loss (RFCOM to All RF Ports) | IL | f ₀ = 0.1GHz to 1.0GHz | | 0.42 | 0.79 | dB |
| | | f ₀ = 1.0GHz to 2.0GHz | | 0.55 | 0.87 | |
| | | f ₀ = 2.0GHz to 2.7GHz | | 0.65 | 1.00 | |
| Isolation (RFCOM to All RF Ports) | ISO | f ₀ = 0.1GHz to 1.0GHz | 26 | 42 | | dB |
| | | f ₀ = 1.0GHz to 2.0GHz | 19 | 34 | | |
| | | f ₀ = 2.0GHz to 2.7GHz | 17 | 30 | | |
| Input Return Loss (RFCOM to All RF Ports) | RL | f ₀ = 0.1GHz to 1.0GHz | | 20 | | dB |
| | | f ₀ = 1.0GHz to 2.0GHz | | 13 | | |
| | | f ₀ = 2.0GHz to 2.7GHz | | 16 | | |
| 0.1dB Compression Point (RFCOM to All RF Ports) | P _{0.1dB} | f ₀ = 0.1GHz to 3GHz | | 27 | | dBm |

MIPI READ AND WRITE TIMING

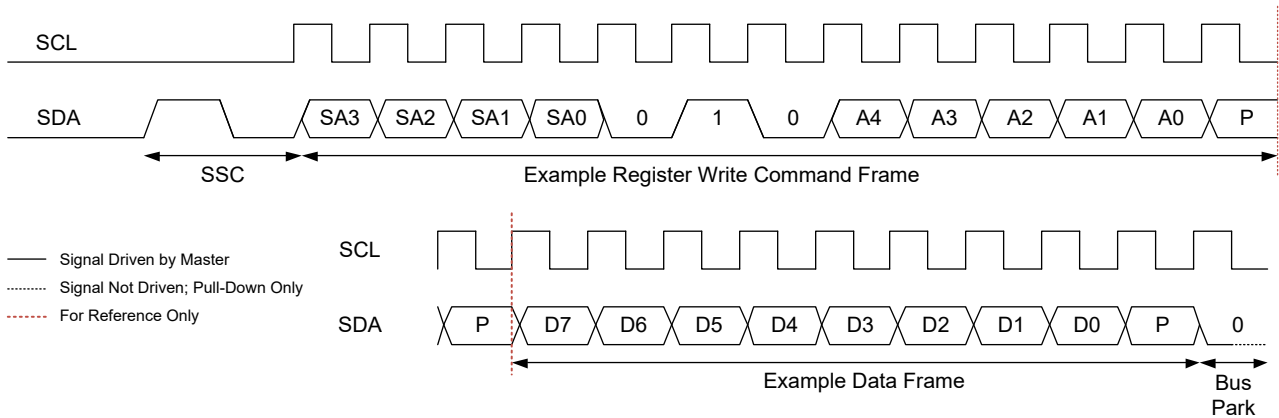


Figure 2. Register Write Command Timing Diagram

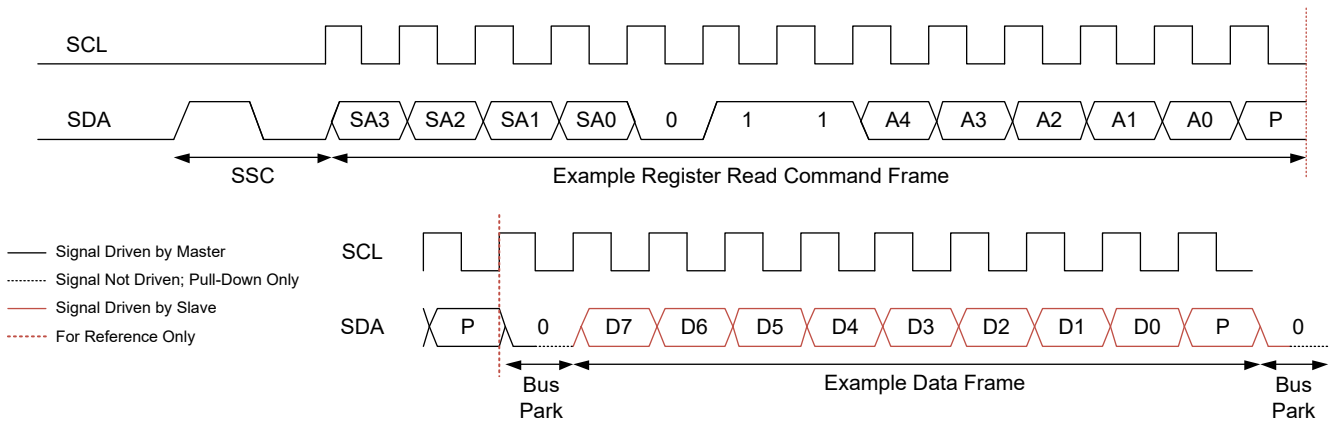


Figure 3. Register Read Command Timing Diagram

COMMAND SEQUENCE BIT DEFINITIONS

| Type | SSC | Command Frame Bits | | | | | Parity Bits | Bus Park Cycle | Extended Operation | | | | | |
|------------------------|-----|--------------------|------|--------|------|--------|-------------|----------------|--------------------|-------------|----------------|-----------------|-------------|----------------|
| | | C[11:8] | C[7] | C[6:5] | C[4] | C[3:0] | | | Data Frame Bits | Parity Bits | Bus Park Cycle | Data Frame Bits | Parity Bits | Bus Park Cycle |
| Reg Write | Y | SA[3:0] | 0 | 10 | A[4] | A[3:0] | Y | - | D[7:0] | Y | Y | - | - | - |
| Reg Read | Y | SA[3:0] | 0 | 11 | A[4] | A[3:0] | Y | Y | D[7:0] | Y | Y | - | - | - |
| Reg ⁰ Write | Y | SA[3:0] | 1 | D[6:5] | D[4] | D[3:0] | Y | Y | - | - | - | - | - | - |

Legends:

SSC = Sequence Start Command

SA = Slave Address

A = Register Address

D = Data Bit

REGISTER MAPS

Register_0

Register Address: 0x00; R/W

Table 2. Register_0 Register Details

| Bits | Bit Name | Description | Default | Type | B/G | Trig |
|--------|-----------|----------------------|----------|------|-----|---------|
| D[7:0] | MODE_CTRL | See Table 1 section. | 00000000 | R/W | No | 0, 1, 2 |

PM_TRIG

Register Address: 0x1C; R/W and W

Table 3. PM_TRIG Register Details

| Bits | Bit Name | Description | Default | Type | B/G | Trig |
|------|----------------|---|---------|------|-----|------|
| D[7] | PWR_MODE_1 | 0: Normal 1: Low power | 0 | R/W | Yes | No |
| D[6] | PWR_MODE_0 | 0: Active - Normal 1: Startup - All registers are reset to the default | 0 | R/W | Yes | No |
| D[5] | TRIGGER_MASK_2 | 0: TRIGGER_2 enabled 1: TRIGGER_2 disabled | 0 | R/W | No | No |
| D[4] | TRIGGER_MASK_1 | 0: TRIGGER_1 enabled 1: TRIGGER_1 disabled | | | | |
| D[3] | TRIGGER_MASK_0 | 0: TRIGGER_0 enabled 1: TRIGGER_0 disabled | | | | |
| D[2] | TRIGGER_2 | 0: Keep its associated destination registers unchanged 1: Load its associated destination registers with the data in the parallel shadow register, provided TRIGGER_MASK_2 is set to logic '0' | 0 | W | Yes | No |
| D[1] | TRIGGER_1 | 0: Keep its associated destination registers unchanged 1: Load its associated destination registers with the data in the parallel shadow register, provided TRIGGER_MASK_1 is set to logic '0' | 0 | W | Yes | No |
| D[0] | TRIGGER_0 | 0: Keep its associated destination registers unchanged 1: Load its associated destination registers with the data in the parallel shadow register, provided TRIGGER_MASK_0 is set to logic '0' | 0 | W | Yes | No |

PRODUCT_ID

Register Address: 0x1D; R

Table 4. PRODUCT_ID Register Details

| Bits | Bit Name | Description | Default | Type | B/G | Trig |
|--------|------------|-----------------|----------|------|-----|------|
| D[7:0] | PRODUCT_ID | Product number. | 00000001 | R | No | No |

MANUFACTURER_ID

Register Address: 0x1E; R

Table 5. MANUFACTURER_ID Register Details

| Bits | Bit Name | Description | Default | Type | B/G | Trig |
|--------|----------------------|--|----------|------|-----|------|
| D[7:0] | MANUFACTURER_ID[7:0] | Lower eight bits of Manufacturer ID. Read-only. Note that during USID programming, the write command sequence is executed on the register, but the value does not change. | 01001010 | R | No | No |

REGISTER MAPS (continued)**MAN_USID**

Register Address: 0x1F; R and R/W

Table 6. MAN_USID Register Details

| Bits | Bit Name | Description | Default | Type | B/G | Trig |
|--------|----------------------|--|---------|------|-----|------|
| D[7:6] | Reserved | Reserved. | 00 | R | No | No |
| D[5:4] | MANUFACTURER_ID[9:8] | Upper two bits of Manufacturer ID. Read-only. Note that during USID programming, the write command sequence is executed on the register, but the value does not change. | 00 | R | No | No |
| D[3:0] | USID | USID of the device. | 1011 | R/W | No | No |

TYPICAL APPLICATION CIRCUIT

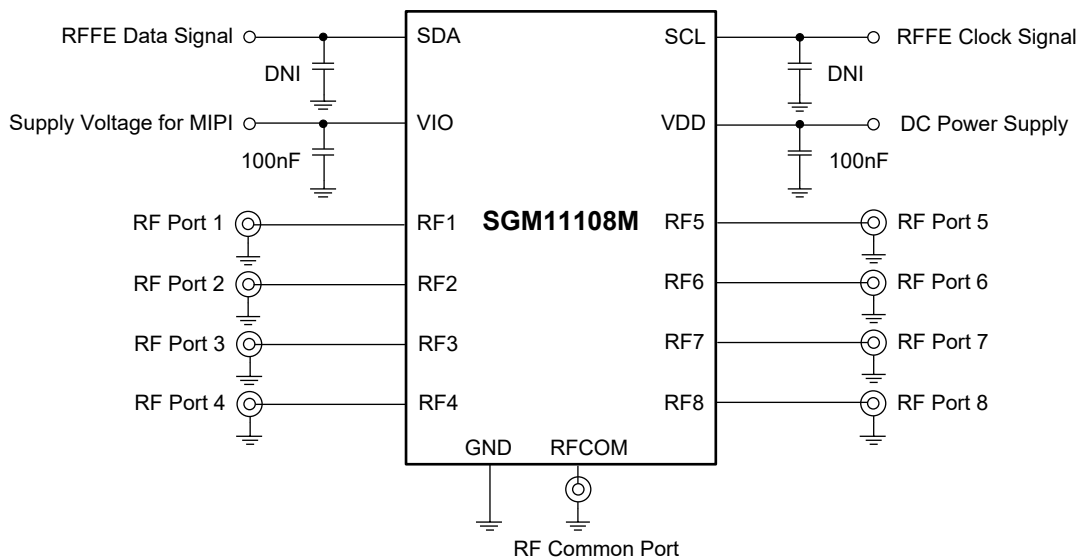


Figure 4. SGM11108M Typical Application Circuit

EVALUATION BOARD LAYOUT

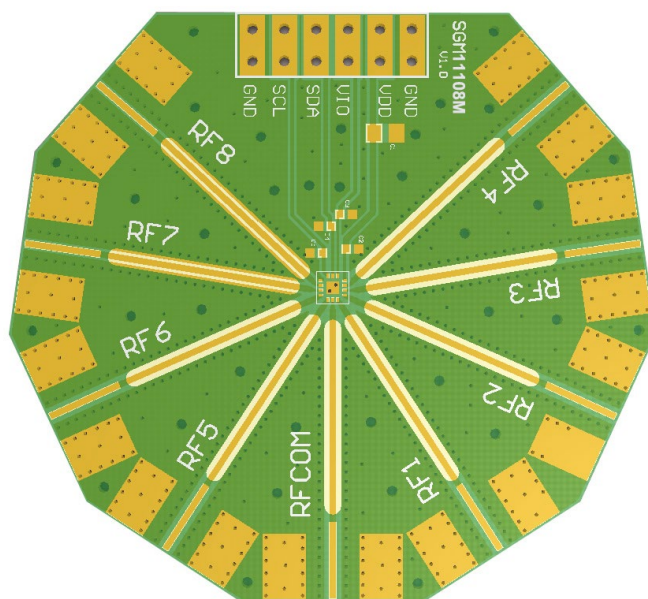


Figure 5. SGM11108M Evaluation Board Layout


REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.


| Changes from Original (DECEMBER 2022) to REV.A | Page |
|---|-------------|
| Changed from product preview to production data..... | All |

PACKAGE OUTLINE DIMENSIONS


UTQFN-2x2-14AL




TOP VIEW



BOTTOM VIEW



SIDE VIEW

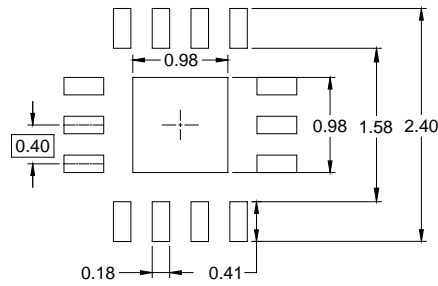

RECOMMENDED LAND PATTERN (Unit: mm)

| Symbol | Dimensions In Millimeters | | |
|--------|---------------------------|-------|-------|
| | MIN | MOD | MAX |
| A | 0.500 | 0.550 | 0.600 |
| A1 | 0.000 | 0.020 | 0.050 |
| A2 | 0.150 REF | | |
| D | 1.950 | 2.000 | 2.050 |
| E | 1.950 | 2.000 | 2.050 |
| D1 | 0.880 | 0.980 | 1.080 |
| E1 | 0.880 | 0.980 | 1.080 |
| b | 0.130 | 0.180 | 0.230 |
| e | 0.400 BSC | | |
| k | 0.150 | - | - |
| L | 0.160 | 0.210 | 0.260 |
| L1 | 0.120 REF | | |

NOTE: This drawing is subject to change without notice.

PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS



TAPE DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

| Package Type | Reel Diameter | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P0 (mm) | P1 (mm) | P2 (mm) | W (mm) | Pin1 Quadrant |
|----------------|---------------|--------------------|---------|---------|---------|---------|---------|---------|--------|---------------|
| UTQFN-2×2-14AL | 7" | 9.5 | 2.25 | 2.25 | 0.75 | 4.0 | 4.0 | 2.0 | 8.0 | Q2 |

000001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

| Reel Type | Length (mm) | Width (mm) | Height (mm) | Pizza/Carton |
|-------------|-------------|------------|-------------|--------------|
| 7" (Option) | 368 | 227 | 224 | 8 |
| 7" | 442 | 410 | 224 | 18 |

DD0002