

## GENERAL DESCRIPTION

The SGM48017C/18C/19C are high-speed gate drivers capable of effectively driving MOSFET and IGBT power switches. They allow for up to 8A source and 13A sink peak currents at  $V_{DD} = 20V$ . The SGM48017C/18C/19C provide a set of comprehensive protection features such as thermal shutdown protection and under-voltage lockout. They operate with a wide supply range of 4.5V to 20V.

The SGM48017C/18C/19C are available in a Green SOT-23-5 package. They operate over a temperature range of  $-40^{\circ}C$  to  $+125^{\circ}C$ .

## APPLICATIONS

Power MOSFETs  
IGBT Driving for Power Supplies  
Motor Drivers

## FEATURES

- Simple and Reliable
- 8A Source and 13A Sink Peak Currents
- Wide Supply Voltage Range: 4.5V to 20V
- Fast Propagation Delay: 30ns (TYP)
- Fast Rise Time: 7ns (TYP)
- Fast Fall Time: 8ns (TYP)
- Ringing Suppression
- Negative Voltage Capability on INx Pin:
  - 10V when  $(V_{DD} - V_{INx}) \leq 22V$
- Negative Voltage Capability on EN Pin:
  - 10V when  $(V_{DD} - V_{EN}) \leq 22V$
- Negative Voltage Capability on OUT Pin:
  - 5V (Pulse < 500ns)
- Protection Features
  - Thermal Shutdown Protection
  - Under-Voltage Lockout
- $-40^{\circ}C$  to  $+125^{\circ}C$  Operating Temperature Range
- Available in a Green SOT-23-5 Package

## TYPICAL APPLICATIONS

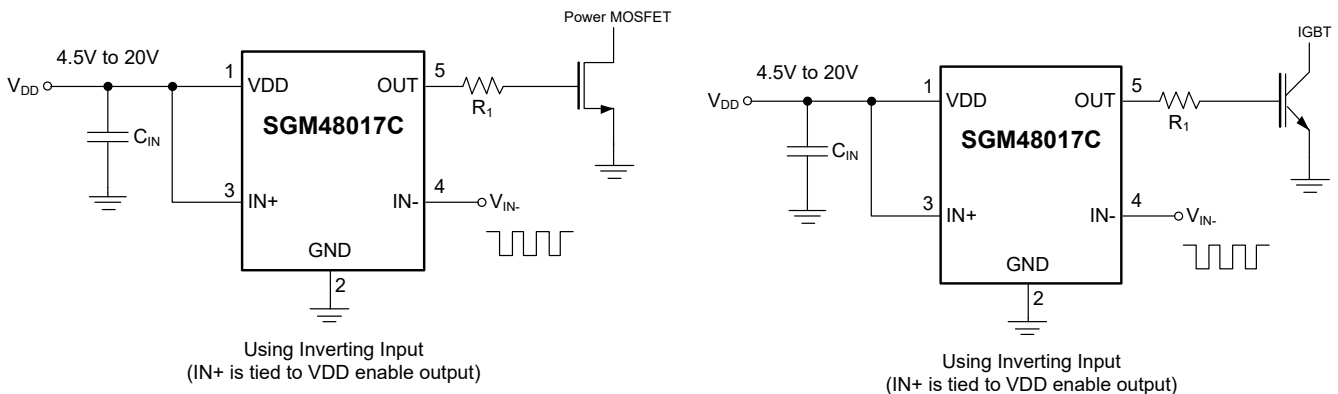



Figure 1. Typical Application Circuits

**PACKAGE/ORDERING INFORMATION**

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM48017C	SOT-23-5	-40°C to +125°C	SGM48017CXN5G/TR	03JXX	Tape and Reel, 3000
SGM48018C	SOT-23-5	-40°C to +125°C	SGM48018CXN5G/TR	03KXX	Tape and Reel, 3000
SGM48019C	SOT-23-5	-40°C to +125°C	SGM48019CXN5G/TR	03LXX	Tape and Reel, 3000

**MARKING INFORMATION**

NOTE: XX = Date Code.

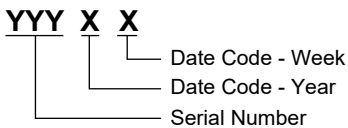

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

**ABSOLUTE MAXIMUM RATINGS**

- VDD ..... -0.3V to 22V
- Continuous INx, when (V<sub>DD</sub> - V<sub>INx</sub>) ≤ 22V  
 ..... -10V to V<sub>DD</sub> + 0.3V
- Continuous EN, when (V<sub>DD</sub> - V<sub>EN</sub>) ≤ 22V  
 ..... -10V to V<sub>DD</sub> + 0.3V
- Continuous OUT (DC)..... -0.3V to V<sub>DD</sub> + 0.3V
- Pulse OUT (Pulse < 500ns) ..... -5V to V<sub>DD</sub> + 0.3V
- Power Dissipation, P<sub>D</sub> @ T<sub>A</sub> = +25°C  
 SOT-23-5 ..... 0.67W
- Package Thermal Resistance  
 SOT-23-5, θ<sub>JA</sub> ..... 185°C/W
- Junction Temperature ..... +150°C
- Storage Temperature Range..... -65°C to +150°C
- Lead Temperature (Soldering, 10s)..... +260°C
- ESD Susceptibility  
 HBM..... 8000V  
 CDM ..... 1000V

**RECOMMENDED OPERATING CONDITIONS**

- Supply Voltage Range ..... 4.5V to 20V
- Operating Junction Temperature Range..... -40°C to +125°C

**OVERSTRESS CAUTION**

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.




**ESD SENSITIVITY CAUTION**

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

**DISCLAIMER**

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

## PIN CONFIGURATIONS

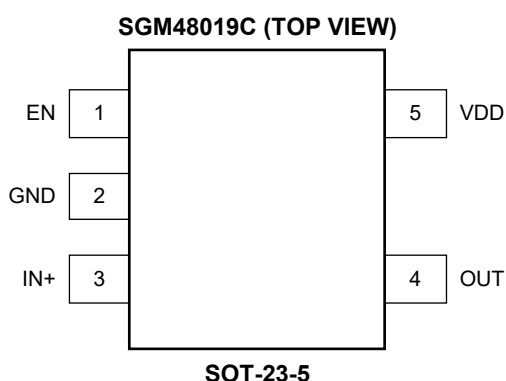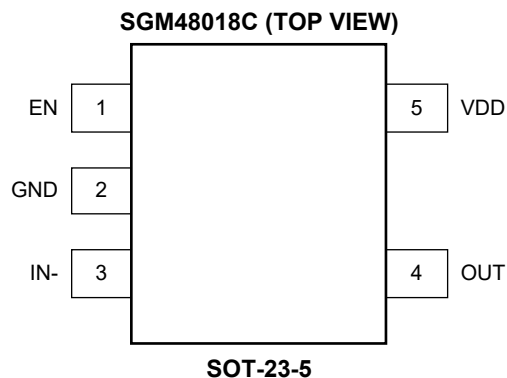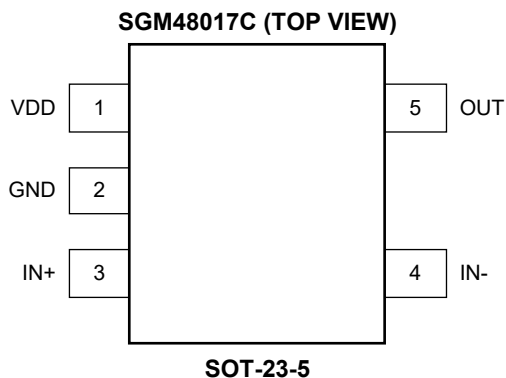

## PIN DESCRIPTION

PIN			NAME	I/O	FUNCTION
SGM48017C	SGM48018C	SGM48019C			
1	5	5	VDD	P	Supply Input. Place a 4.7μF decoupling capacitor between this pin and GND pin close to the device.
2	2	2	GND	G	Ground. All signals are referenced to this pin.
3	—	3	IN+	I	Non-Inverting Input. OUT is held low if IN+ is floating. For the SGM48017C, when the driver is used in inverting configuration, pull IN+ high in order to enable output.
4	3	—	IN-	I	Inverting Input. OUT is held low if IN- is floating. For the SGM48017C, when the driver is used in non-inverting configuration, pull IN- low in order to enable output.
5	4	4	OUT	O	Source/Sink Current Output of Driver.
—	1	1	EN	I	Enable Input. EN is biased low to disable output regardless of input state. EN is biased high or left floating to enable output. EN is allowed to float.



**NOTE:**

P: power supply, I: input, O: output, G: ground.



# PACKAGE INFORMATION

## PACKAGE OUTLINE DIMENSIONS

### SOT-23-5

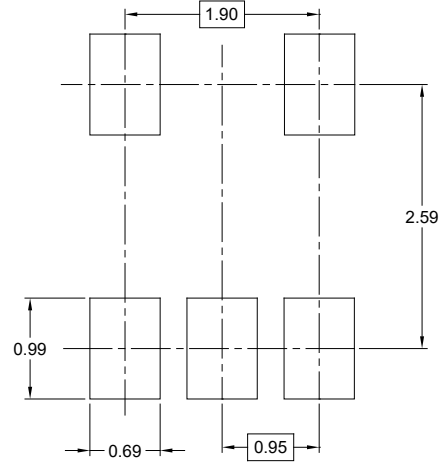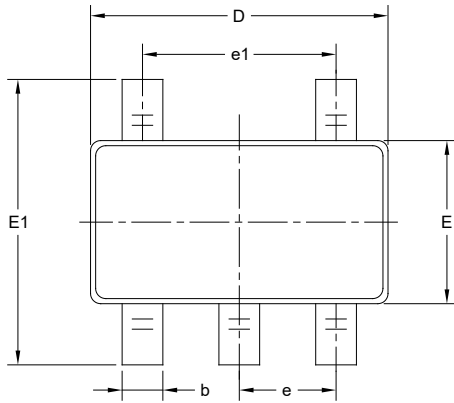

RECOMMENDED LAND PATTERN (Unit: mm)

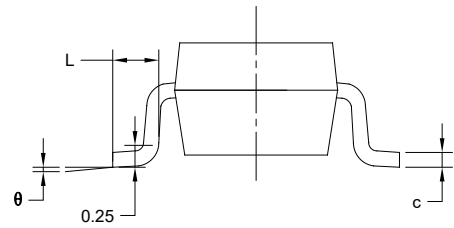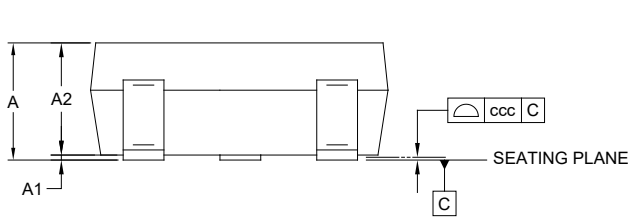

Symbol	Dimensions In Millimeters		
	MIN	MOD	MAX
A	-	-	1.450
A1	0.000	-	0.150
A2	0.900	-	1.300
b	0.300	-	0.500
c	0.080	-	0.220
D	2.750	-	3.050
E	1.450	-	1.750
E1	2.600	-	3.000
e	0.950 BSC		
e1	1.900 BSC		
L	0.300	-	0.600
$\theta$	0°	-	8°
ccc	0.100		

NOTES:

1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.
3. Reference JEDEC MO-178.

# PACKAGE INFORMATION

## TAPE AND REEL INFORMATION

### REEL DIMENSIONS



### TAPE DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

### KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOT-23-5	7"	9.5	3.20	3.20	1.40	4.0	4.0	2.0	8.0	Q3

DD0001

# PACKAGE INFORMATION

## CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

## KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002