

GENERAL DESCRIPTION

The 74LVC1G08Q provides a single 2-input positive AND gate that is designed for 1.65V to 5.5V V_{CC} operation. The device features the Boolean function $Y = A \cdot B$ or $Y = \overline{\overline{A} + \overline{B}}$.

The 74LVC1G08Q is capable of holding high output drive while low static power dissipation can be maintained over the wide supply voltage operating range.

The device is AEC-Q100 qualified (Automotive Electronics Council (AEC) standard Q100 Grade 1) and it is suitable for automotive applications.

The 74LVC1G08Q is available in Green SC70-5 and SOT-23-5 packages and supports -40°C to $+125^{\circ}\text{C}$ temperature range.

APPLICATIONS

- Automotive Applications
- Computing: Server, PC and Notebook
- Medical Equipment
- Industrial Equipment
- Telecom Equipment
- Wireless Equipment
- Battery Powered Equipment

FUNCTION TABLE

INPUTS		OUTPUT
A	B	Y
H	H	H
L	X	L
X	L	L

$Y = A \cdot B$ or $Y = \overline{\overline{A} + \overline{B}}$

H = High Voltage Level


L = Low Voltage Level

X = Don't Care


FEATURES

- **AEC-Q100 Qualified for Automotive Applications Device Temperature Grade 1**
 $T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$
- **Wide Supply Voltage Range: 1.65V to 5.5V**
- **Inputs Accept Voltages Higher than the Supply Voltage and up to 5.5V**
- **+24mA/-24mA Output Current at $V_{CC} = 3.0\text{V}$**
- **Low Power Consumption: $I_{CC} = 10\mu\text{A}$ (MAX)**
- **Propagation Delay: 4.0ns (TYP) at $V_{CC} = 3.3\text{V}$**
- **Support Down Translation to V_{CC}**
- **Support Partial Power-Down Mode, Live Insertion and Back-Drive Protection**
- **-40°C to $+125^{\circ}\text{C}$ Operating Temperature Range**
- **Available in Green SC70-5 and SOT-23-5 Packages**

LOGIC SYMBOL

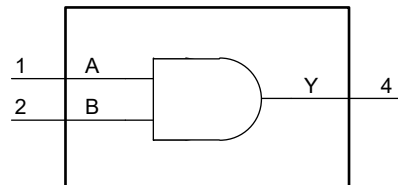

LOGIC DIAGRAM

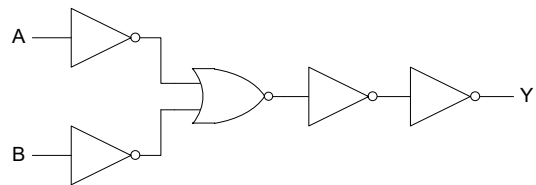

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
74LVC1G08Q	SC70-5	-40°C to +125°C	74LVC1G08QC5G/TR	1L6XX	Tape and Reel, 3000
	SOT-23-5	-40°C to +125°C	74LVC1G08QN5G/TR	1LB XXXXX	Tape and Reel, 3000

MARKING INFORMATION

NOTE: XX = Date Code. XXXXX = Date Code, Trace Code and Vendor Code.

SC70-5

YYY X X

— Date Code - Week
— Date Code - Year
— Serial Number

SOT-23-5

XXXXX

— Vendor Code
— Trace Code
— Date Code - Year

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V_{CC}	-0.5V to 6.5V
Input Voltage, V_I ⁽¹⁾	-0.5V to 6.5V
Output Voltage, V_O ⁽¹⁾	
High-State or Low-State.....	-0.5V to MIN(6.5V, $V_{CC} + 0.5V$)
High-Impedance or Power-Off Mode	-0.5V to 6.5V
Input Clamp Current, I_{IK} ($V_I < 0V$)	-50mA
Output Clamp Current, I_{OK} ($V_O < 0V$)	-50mA
Continuous Output Current, I_O ($V_O = 0V$ to V_{CC}).....	$\pm 50mA$
Continuous Current through V_{CC} or GND.....	$\pm 100mA$
Junction Temperature ⁽²⁾	+150°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (Soldering, 10s).....	+260°C
ESD Susceptibility ^{(3) (4)}	
HBM.....	$\pm 7000V$
CDM	$\pm 1000V$

NOTES:

- The input and output voltage ratings may be exceeded if the input and output clamp current ratings are observed.
- The performance capability of a high-performance integrated circuit in conjunction with its thermal environment can create junction temperatures which are detrimental to reliability.
- For human body model (HBM), all pins comply with AEC-Q100-002 specification.
- For charged device model (CDM), all pins comply with AEC-Q100-011 specification.

RECOMMENDED OPERATING CONDITIONS

Supply Voltage, V_{CC}	1.65V to 5.5V
Input Voltage, V_I	0V to 5.5V
Output Voltage, V_O	0V to V_{CC}
Operating Temperature Range.....	-40°C to +125°C

OVERSTRESS CAUTION


Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

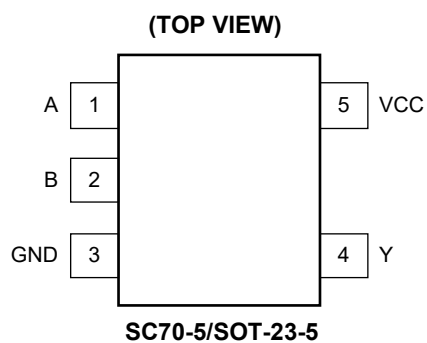PIN CONFIGURATIONS**PIN DESCRIPTION**

PIN	NAME	FUNCTION
1, 2	A, B	Data Inputs.
3	GND	Ground Pin.
4	Y	Data Output.
5	VCC	Power Supply Pin.

ELECTRICAL CHARACTERISTICS(Full = -40°C to +125°C, all typical values are measured at $T_A = +25^\circ\text{C}$ and $V_{CC} = 3.3\text{V}$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS	
High-Level Input Voltage	V_{IH}	$V_{CC} = 1.65\text{V to } 1.95\text{V}$	Full	$0.65 \times V_{CC}$			V	
		$V_{CC} = 2.3\text{V to } 2.7\text{V}$	Full	1.7				
		$V_{CC} = 2.7\text{V to } 3.6\text{V}$	Full	2.0				
		$V_{CC} = 4.5\text{V to } 5.5\text{V}$	Full	$0.7 \times V_{CC}$				
Low-Level Input Voltage	V_{IL}	$V_{CC} = 1.65\text{V to } 1.95\text{V}$	Full			$0.35 \times V_{CC}$	V	
		$V_{CC} = 2.3\text{V to } 2.7\text{V}$	Full			0.7		
		$V_{CC} = 2.7\text{V to } 3.6\text{V}$	Full			0.8		
		$V_{CC} = 4.5\text{V to } 5.5\text{V}$	Full			$0.3 \times V_{CC}$		
High-Level Output Voltage	V_{OH}	$V_I = V_{IH} \text{ or } V_{IL}$	$V_{CC} = 1.65\text{V to } 5.5\text{V}, I_{OH} = -100\mu\text{A}$	Full	$V_{CC} - 0.1$	$V_{CC} - 0.01$	V	
			$V_{CC} = 1.65\text{V}, I_{OH} = -4\text{mA}$	Full	1.2	1.55		
			$V_{CC} = 2.3\text{V}, I_{OH} = -8\text{mA}$	Full	1.9	2.19		
			$V_{CC} = 2.7\text{V}, I_{OH} = -12\text{mA}$	Full	2.3	2.55		
			$V_{CC} = 3.0\text{V}, I_{OH} = -16\text{mA}$	Full	2.4	2.80		
			$V_{CC} = 3.0\text{V}, I_{OH} = -24\text{mA}$	Full	2.3	2.70		
			$V_{CC} = 4.5\text{V}, I_{OH} = -32\text{mA}$	Full	3.8	4.20		
Low-Level Output Voltage	V_{OL}	$V_I = V_{IH} \text{ or } V_{IL}$	$V_{CC} = 1.65\text{V to } 5.5\text{V}, I_{OL} = 100\mu\text{A}$	Full		0.01	0.1	V
			$V_{CC} = 1.65\text{V}, I_{OL} = 4\text{mA}$	Full		0.10	0.45	
			$V_{CC} = 2.3\text{V}, I_{OL} = 8\text{mA}$	Full		0.15	0.3	
			$V_{CC} = 2.7\text{V}, I_{OL} = 12\text{mA}$	Full		0.20	0.5	
			$V_{CC} = 3.0\text{V}, I_{OL} = 16\text{mA}$	Full		0.20	0.4	
			$V_{CC} = 3.0\text{V}, I_{OL} = 24\text{mA}$	Full		0.30	0.55	
			$V_{CC} = 4.5\text{V}, I_{OL} = 32\text{mA}$	Full		0.35	0.55	
Input Leakage Current	I_I	A or B input, $V_{CC} = 0\text{V to } 5.5\text{V}, V_I = 5.5\text{V or GND}$	Full		± 0.1	± 5	μA	
Power-Off Leakage Current	I_{OFF}	$V_{CC} = 0\text{V}, V_I \text{ or } V_O = 5.5\text{V}$	Full		± 0.1	± 10	μA	
Supply Current	I_{CC}	$V_{CC} = 1.65\text{V to } 5.5\text{V}, V_I = 5.5\text{V or GND}, I_O = 0\text{A}$	Full		0.1	10	μA	
Additional Supply Current	ΔI_{CC}	Per pin, $V_{CC} = 3.0\text{V to } 5.5\text{V}, V_I = V_{CC} - 0.6\text{V}, I_O = 0\text{A}$	Full		0.1	500	μA	
Input Capacitance	C_i	$V_{CC} = 3.3\text{V}, V_I = V_{CC} \text{ or } \text{GND}$	+25°C		4		pF	

DYNAMIC CHARACTERISTICS(For test circuit see Figure 1. Full = -40°C to +125°C, all typical values are measured at T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN ⁽²⁾	TYP	MAX ⁽²⁾	UNITS	
Propagation Delay ⁽¹⁾	t _{PD}	A or B to Y, see Table 1	V _{CC} = 1.8V ± 0.15V	Full	1.0	8.5	12.6	ns
			V _{CC} = 2.5V ± 0.2V	Full	0.5	5.0	7.9	
			V _{CC} = 3.3V ± 0.3V	Full	0.5	4.0	6.6	
			V _{CC} = 5.0V ± 0.5V	Full	0.5	3.5	5.8	
Power Dissipation Capacitance ⁽³⁾	C _{PD}	f = 10MHz	V _{CC} = 1.8V	+25°C		29	pF	
			V _{CC} = 2.5V	+25°C		29		
			V _{CC} = 3.3V	+25°C		30		
			V _{CC} = 5.0V	+25°C		31		

NOTES:

- t_{PD} is the same as t_{PLH} and t_{PHL}.
- Specified by design and characterization, not production tested.
- C_{PD} is used to determine the dynamic power dissipation (P_D in μW).

$$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o)$$


where:

f_i = Input frequency in MHz.f_o = Output frequency in MHz.C_L = Output load capacitance in pF.V_{CC} = Supply voltage in Volts.

N = Number of inputs switching.

Σ(C_L × V_{CC}² × f_o) = Sum of outputs.

TEST CIRCUIT

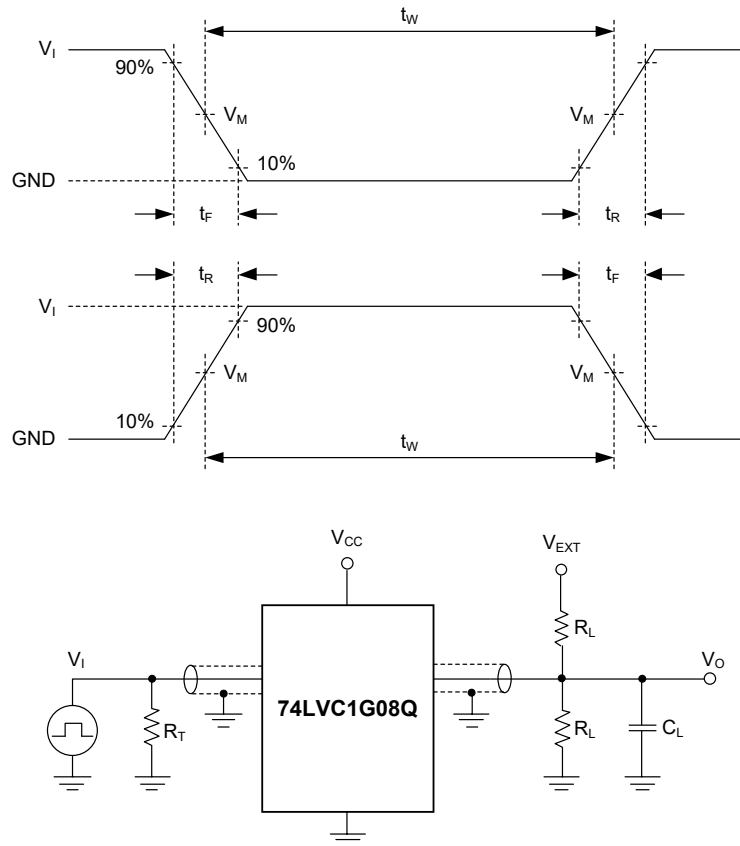

Test conditions are given in Table 1.

Definitions for test circuit:

R_L : Load resistance.

C_L : Load capacitance (includes jig and probe).

R_T : Termination resistance (equals to output impedance Z_o of the pulse generator).


V_{EXT} : External voltage is used to measure switching times.

Figure 1. Test Circuit for Measuring Switching Times

Table 1. Test Conditions

SUPPLY VOLTAGE	INPUT		LOAD		V_{EXT}
V_{CC}	V_I	t_R, t_F	C_L	R_L	t_{PLH}, t_{PHL}
$1.8V \pm 0.15V$	V_{CC}	$\leq 2.0ns$	30pF	1k Ω	Open
$2.5V \pm 0.2V$	V_{CC}	$\leq 2.0ns$	30pF	500 Ω	Open
$3.3V \pm 0.3V$	3.0V	$\leq 2.5ns$	50pF	500 Ω	Open
$5.0V \pm 0.5V$	V_{CC}	$\leq 2.5ns$	50pF	500 Ω	Open

WAVEFORMS

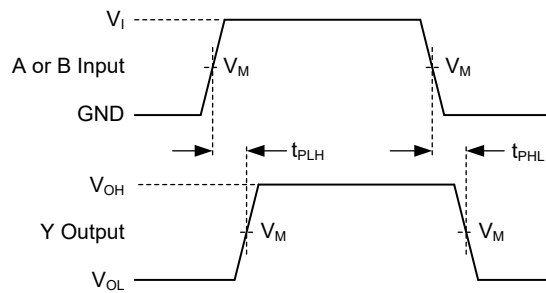

Test conditions are given in Table 1.

Measurement points are given in Table 2.

Logic levels: V_{OL} and V_{OH} are typical output voltage levels that occur with the output load.

Figure 2. Input (A or B) to Output (Y) Propagation Delays

Table 2. Measurement Points

SUPPLY VOLTAGE	INPUT		OUTPUT
V_{CC}	V_I	$V_M^{(1)}$	V_M
$1.8V \pm 0.15V$	V_{CC}	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$
$2.5V \pm 0.2V$	V_{CC}	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$
$3.3V \pm 0.3V$	3.0V	1.5V	1.5V
$5.0V \pm 0.5V$	V_{CC}	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$

NOTE:

1. The measurement points should be V_{IH} or V_{IL} when the input rising or falling time exceeds 2.5ns.



REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.



Changes from Original (JANUARY 2025) to REV.A	Page
Changed from product preview to production data.....	All

PACKAGE OUTLINE DIMENSIONS

SC70-5

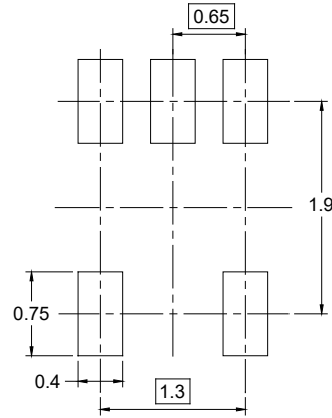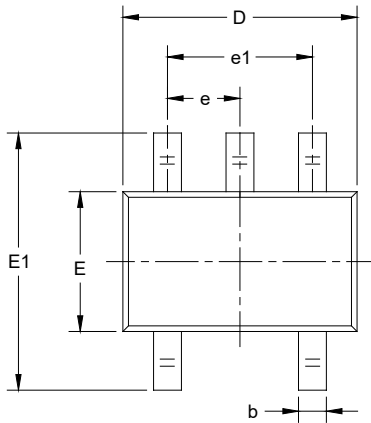

RECOMMENDED LAND PATTERN (Unit: mm)

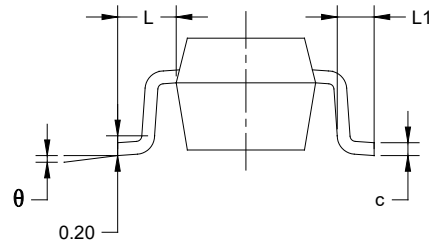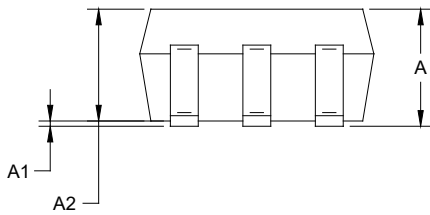

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.800	1.100	0.031	0.043
A1	0.000	0.100	0.000	0.004
A2	0.800	1.000	0.031	0.039
b	0.150	0.350	0.006	0.014
c	0.080	0.220	0.003	0.009
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.65 TYP		0.026 TYP	
e1	1.300 BSC		0.051 BSC	
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°



NOTES:

1. Body dimensions do not include mode flash or protrusion.
2. This drawing is subject to change without notice.



PACKAGE INFORMATION

PACKAGE OUTLINE DIMENSIONS

SOT-23-5

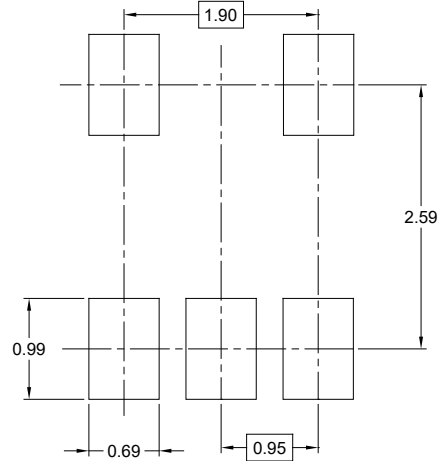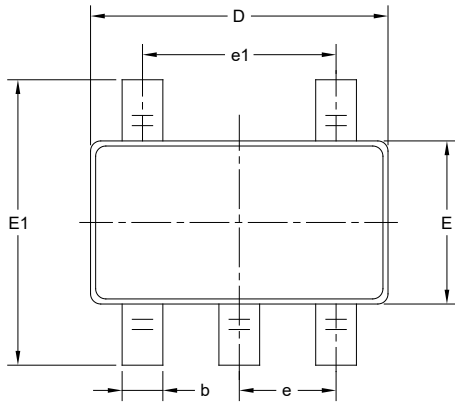

RECOMMENDED LAND PATTERN (Unit: mm)

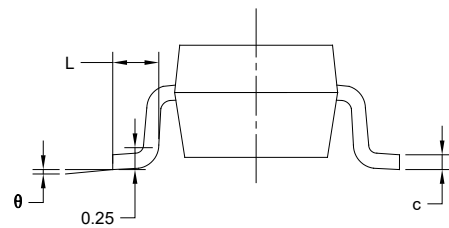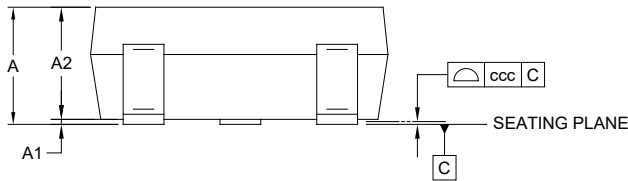


Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	-	-	1.450
A1	0.000	-	0.150
A2	0.900	-	1.300
b	0.300	-	0.500
c	0.080	-	0.220
D	2.750	-	3.050
E	1.450	-	1.750
E1	2.600	-	3.000
e	0.950 BSC		
e1	1.900 BSC		
L	0.300	-	0.600
θ	0°	-	8°
ccc	0.100		

NOTES:


1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.
3. Reference JEDEC MO-178.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

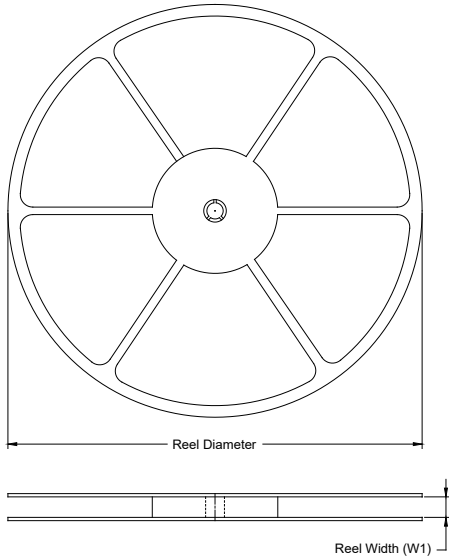

TAPE DIMENSIONS

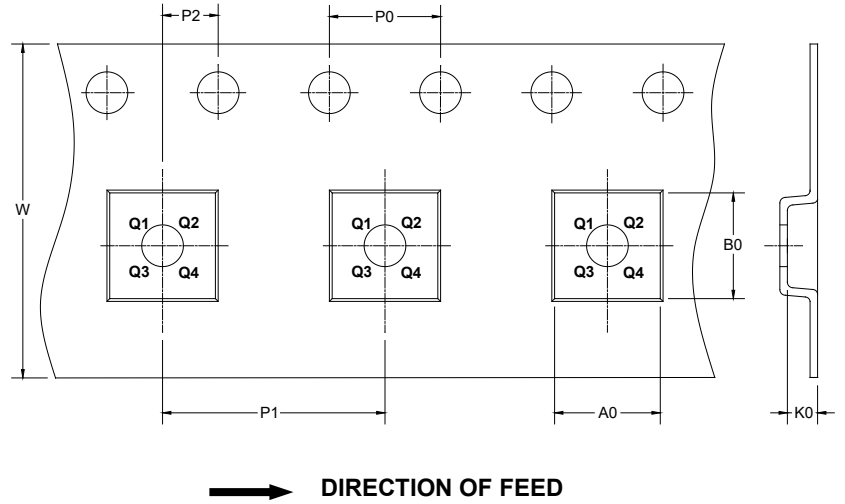

NOTE: The picture is only for reference. Please make the object as the standard.


KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SC70-5	7"	9.5	2.40	2.50	1.20	4.0	4.0	2.0	8.0	Q3
SOT-23-5	7"	9.5	3.20	3.20	1.40	4.0	4.0	2.0	8.0	Q3

DR00001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS

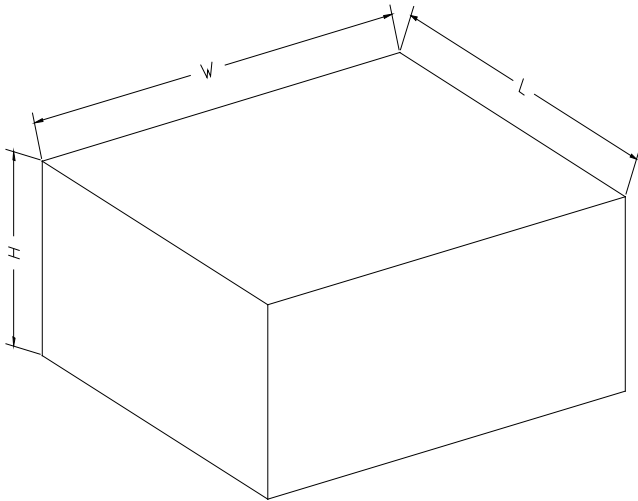

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

D00002